

A check in the amount of \$1,306 for the filing fee is enclosed herewith.

The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. 22-0190. A duplicate copy of this sheet is enclosed.

A Request by Applicants for Interference With Patent (37 C.F.R. § 1.607) is enclosed, along with a copy of the Stam et al. United States Patent 5,837,994 attached thereto.

A Preliminary Amendment is enclosed. Please enter the amendment before calculating the fee.

Please amend the specification as follows:

Page 1, line 3:

After "This application is a" insert --continuation of application Serial No. 09/135,565, filed on August 17, 1998, by Kenneth Schofield, Mark L. Larson and Keith J. Vadas, which is a continuation of application Serial No. 08/621,863, filed on March 25, 1996, now Patent No. 5,796,094, by Kenneth Schofield, Mark L. Larson and Keith J. Vadas, which is a--.

Page 1, line 4:

After "1993," insert --now Patent No. 5,550,677,--.

New formal drawings are enclosed.

The prior application is assigned to Donnelly Corporation of 414 East Fortieth Street, Holland, Michigan 49423 as recorded at Reel 7924, Frame 0115, on March 25, 1996.

An Information Disclosure Statement is enclosed.

The power of attorney in the prior application is to Van Dyke, Gardner, Linn & Burkhardt, LLP consisting of Daniel Van Dyke, Reg. No. 25 046; Donald S. Gardner, Reg. No. 25 975; Terence J. Linn, Reg. No. 30 283; and Frederick S. Burkhardt, Reg. No. 29 288.

The power of attorney appears in the original papers of the prior application.


Address all future communications to:

Frederick S. Burkhart
Van Dyke, Gardner, Linn & Burkhart, LLP
2851 Charlevoix Drive, S.E., Suite 207
Post Office Box 888695
Grand Rapids, Michigan 49588-8695

Respectfully submitted,

KENNETH (NMI) SCHOFIELD,
MARK L. LARSON and
KEITH J. VADAS

By: Van Dyke, Gardner, Linn
& Burkhart, LLP

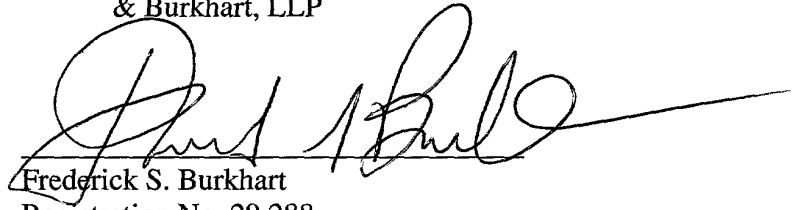A handwritten signature in black ink, appearing to read "Fred S. Burkhart", is written over a horizontal line.

Dated: November 16, 1999.

Frederick S. Burkhart
Registration No. 29 288
2851 Charlevoix Drive, S.E., Suite 207
Post Office Box 888695
Grand Rapids, Michigan 49588-8695
(616) 975-5500

FSB:TAF:tl:djr
DON01 P-770

PATENT

DON01 P-770

Express Mail #EL403700325US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Kenneth (NMI) Schofield, Mark L. Larson and Keith J. Vadas
For : VEHICLE HEADLIGHT CONTROL USING IMAGING
SENSOR

Hon. Commissioner of Patents and Trademarks
Washington, D.C. 20231


Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I certify that this paper together with the attached continuation patent application comprising a Request by Applicants for Interference With Patent (37 C.E.R. § 1.607) (11 pages), along with a copy of Stam et al. United States Patent 5,837,994 (15 pages); Preliminary Amendment (8 pages); copy of prior application Serial No. 09/135,565, filed on August 17, 1998 (25 pages), and Declaration as originally filed (1 page); eleven (11) sheets of drawings (in duplicate); cover letter (3 pages, in duplicate); Information Disclosure Statement (1 page), Forms PTO-1449 (3 sheets), and copies of information referenced (1 book); check in the amount of \$1,306 for the filing fee and return postal card are being deposited with the United States Postal Service as Express Mail in an envelope having Express Mail Mailing Label Number EL403700325US addressed to:

Box Patent Application
Hon. Commissioner of Patents and Trademarks
Washington, D.C. 20231

on November 16, 1999.



Donna J. Raaymakers
Van Dyke, Gardner, Linn & Burkhardt, LLP
2851 Charlevoix Drive, S.E., Suite 207
Post Office Box 888695
Grand Rapids, Michigan 49588-8695
(616) 975-5500

FSB:TAF:tl:djr
DON01 P-699
Enc.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Kenneth (NMI) Schofield, Mark L. Larson and Keith J. Vadas
For : VEHICLE HEADLIGHT CONTROL USING IMAGING SENSOR

Hon. Commissioner of Patents and Trademarks
Washington, D.C. 20231

Dear Sir:

PRELIMINARY AMENDMENT

Prior to examination, Applicants wish to amend their application as follows:

In the Specification:

Page 5, line 16:

Delete "co-pending application Serial No. 08/023,918 filed
February 26, 1993, by" and insert therefor --United States Patent No. 5,550,677 issued to--.

Page 9, line 8:

Delete "110" and insert therefor --109--.

In the Claims:

Cancel claims 1-53 and add new claims 54-99 as follows:

54. A control system for automatically controlling the state of the head lamps of a controlled vehicle, said control system comprising:

an optical system for imaging external sources of light within a predetermined field of view; and

an imaging processing system for processing images from said optical system and providing a control signal for controlling the state of the headlamps as a function of the relative output of pixels imaging the same spectral band of light.

Applicants : Kenneth (NMI) Schofield, Mark L. Larson and Keith J. Vadas
For : VEHICLE HEADLIGHT CONTROL USING IMAGING SENSOR
Page : 2

55. The control system as recited in Claim 54, wherein said optical system is configured to image light sources over a predetermined horizontal and vertical range defining said predetermined field of view.

56. The control system as recited in Claim 55, wherein said optical system is fixed relative to said controlled vehicle.

57. The control system as recited in Claim 55, wherein said optical system includes an image array sensor containing a plurality of pixels.

58. The control system as recited in Claim 57, wherein said pixel image array sensor is a CMOS active pixel image array sensor.

59. The control system as recited in Claim 55, wherein said optical system includes means for baffling light outside said predetermined field of view.

60. The control system as recited in Claim 57, wherein said optical system is further configured to spatially segregate light sources having different spectral compositions on said pixel image array sensor.

61. A control system as recited in Claim 54, wherein said image processing system processes images on a frame by frame basis and examines various frames in order to detect the motion of various light sources relative to said controlled vehicle.

62. The control system as recited in Claim 61, wherein said image processing system compares successive frames to detect vertical motion of said light sources relative to said controlled vehicle.

63. The control system as recited in Claim 62, wherein said light sources are overhead street lamps.

Applicants : Kenneth (NMI) Schofield, Mark L. Larson and Keith J. Vadas
For : VEHICLE HEADLIGHT CONTROL USING IMAGING SENSOR
Page : 3

64. The control system as recited in Claim 63, wherein said image processing system compares successive frames to detect horizontal motion of said light sources relative to said controlled vehicle.

65. The control system as recited in Claim 64, wherein said light sources are reflected lights from stationary reflectors relative to said controlled vehicle.

66. The control system as recited in Claim 54, wherein said optical system includes means for filtering infrared light from said external sources of light.

67. The control system as recited in Claim 54, wherein said optical system includes two or more lenses and an image array sensor.

68. The control system as recited in Claim 67, wherein said two or more lenses and said array sensor are configured to image said predetermined field of view onto different portions of said image array sensor.

69. The control system as recited in Claim 68, further including means for filtering the light through said two or more lenses such that one of said two or more lenses filters light below a first predetermined wavelength and another of said two or more lenses filters light above a second predetermined wavelength.

70. The control system as recited in Claim 69, wherein said first and second predetermined wavelengths are the same.

71. The control system as recited in Claim 69, wherein one of said two or more lenses transmits light having a wavelength longer than 600 nm defining a red filter for imaging tail lights on one portion of said image array sensor.

Applicants : Kenneth (NMI) Schofield, Mark L. Larson and Keith J. Vadas
For : VEHICLE HEADLIGHT CONTROL USING IMAGING SENSOR
Page : 4

72. The control system as recited in Claim 71, wherein tail lamps are detected by comparing the relative output of a pixel imaged through the red filter with the average pixel output of a selected group of neighboring pixels imaged through the red filter and indicating a tail lamp detection when the pixel output is a predetermined percentage higher than the average pixel output of said selected group of pixels.

73. The control system as recited in Claim 71, wherein another one of said two or more lenses transmits light having a wavelength shorter than 600 nm defining a cyan filter for imaging headlamps on another portion of said image array sensor.

74. The control system as recited in Claim 73, wherein head lamps are detected by comparing the relative output of a pixel imaged through the cyan filter with the average output of a selected group of pixels and indicating a head lamp when the pixel output is a predetermined percentage higher than the average pixel output of said selected group of pixels.

75. The control system as recited in Claim 73, wherein said image processing system includes means for processing images from said optical system on a frame by frame basis.

76. The control system as recited in Claim 75, wherein said image processing system includes means for detecting external headlamps in each frame.

77. The control system as recited in Claim 76, wherein said image processing system includes means for detecting tail lamps in each frame.

78. The control system as recited in Claim 77, wherein said image processing system includes a dim counter, which is incremented, whenever a frame is processed which contains at least one tail lamp or head lamp.

79. The control system as recited in Claim 78, wherein said dim counter is reset whenever a frame containing no head lamps or tail lamps is processed.

Applicants : Kenneth (NMI) Schofield, Mark L. Larson and Keith J. Vadas
For : VEHICLE HEADLIGHT CONTROL USING IMAGING SENSOR
Page : 5

80. The control system as recited in Claim 79, wherein said control signal is generated as a function of the value of the dim counter.

81. The control system as recited in Claim 77, wherein said image processing system includes an undim counter, which is incremented each time a clear frame is processed.

82. The control system as recited in Claim 81, wherein said undim counter is reset when a head lamp or tail lamp is detected in a frame.

83. The control system as recited in Claim 67, wherein said image processing system includes means for computing the average output of a selected group of neighboring pixels in said image array sensor.

84. The control system as recited in Claim 54, wherein said control signal is used to turn the high beam head lamps completely on or completely off.

85. The control system as recited in Claim 54, wherein said control signal is used to continuously vary the brightness level of said high beam head lamps between completely on and completely off.

86. The control system as recited in Claim 85, wherein said control signal is used to vary the duty cycle of said head lamps.

87. The control system, as recited in Claim 54, wherein said optical system includes an image array sensor containing a plurality of pixels, and where the control signal is based on a pixel threshold value that varies as a function of the predetermined field of view imaged by said plurality of pixels.

88. The control system recited in Claim 54, wherein said optical system includes an image array sensor containing a plurality of pixels, and where the image processing system is configured to respond to a lower output from pixels imaging the predetermined field of view

Applicants : Kenneth (NMI) Schofield, Mark L. Larson and Keith J. Vadas
For : VEHICLE HEADLIGHT CONTROL USING IMAGING SENSOR
Page : 6

directly in front of the controlled vehicle than from pixels imaging other regions of the predetermined field of view.

89. A control system for automatically controlling the state of the head lamps of a controlled vehicle, the control system comprising:

an optical system for imaging external sources of light within a predetermined field of view, the optical system including an image array sensor and two or more lenses, each configured to image said predetermined field of view onto two or more corresponding portions of said array; and

an image processing system for processing images from said optical system and providing a control signal for controlling the head lamps as a function of the relative output of the pixels imaging said external sources of light.

90. The control system as recited in Claim 89, wherein said optical system is fixed relative to said controlled vehicle.

91. The control system as recited in Claim 89, further including means for filtering the light through said two or more lenses.

92. The control system as recited in Claim 91, wherein said filtering means includes a filter dye for said two or more lenses.

93. The control system as recited in Claim 89, having a first lens and a second lens.

94. A control system for automatically controlling the high beam state of the head lamps of a controlled vehicle comprising:

an optical system for imaging external sources of light within a predetermined field of view onto an image sensor containing a plurality of pixels, said optical system configured to selectively transmit one or more predetermined spectral bands of light, and said optical system configured to image light within each predetermined spectral band onto different predetermined blocks within said image sensor; and

an image processing system for processing images from said optical system and providing a control signal for controlling the high beam state of the head lamps as a function of the output of one or more pixels within each of said predetermined blocks, relative to the output of other pixels within the same block.

95. The control system as recited in Claim 94, wherein said image processing system provides a control signal for controlling the high beam state of the head lamps as a function of the output of pixels within one of said predetermined blocks relative to the output of pixels within another one of said predetermined blocks and where each of said pixels within one block images substantially the same region of space as a corresponding pixel within the other block.

96. The control system recited in Claim 95, wherein the optical system contains two or more lenses, each lens having an associated filter to transmit a predetermined spectral band of light and each lens configured to image said field of view onto different designated blocks of said image sensor.

97. The control system recited in Claim 96, wherein the optical system is configured to prevent light passing through one said lens from arriving onto the block of the image sensor designated for light imaged by another of said two or more lenses.

98. The control system as recited in Claim 94, wherein said optical system contains a baffling means to prevent light from outside of said predetermined field of view from arriving on said image sensor.

99. A control system for automatically controlling the high beam state of the head lamps of a controlled vehicle comprising:

an optical system for imaging external sources of light within a predetermined field of view onto an image array sensor, said optical system configured to distinguish light sources which emit red light from those which emit white light, said optical system further configured to not image light in the infrared region of the spectrum emitted by said light sources, thereby

Applicants : Kenneth (NMI) Schofield, Mark L. Larson and Keith J. Vadas
For : VEHICLE HEADLIGHT CONTROL USING IMAGING SENSOR
Page : 8

increasing the distinction between said red-emitting sources and said white-emitting sources;
and

an image processing system for processing images from said optical system and
providing a control signal for controlling the high beam state of the head lamps.

REMARKS

Entry of the amendment prior to calculation of the filing fee is requested. The
amendment herein is fully supported by the application as filed. Accordingly, no new matter is
added.

New Claims 54-99 are copied from Claims 1-40, 44-45, and 47-50 in United States
Patent No. 5,837,994 issued to Stam et al. Pursuant to 37 CFR § 1.607, Applicants hereby
notify the Examiner that the new Claims 54-99 have been copied from the Stam et al. '994 patent
for the purpose of invoking an interference with the Stam et al. '994 patent. Attached is a
REQUEST BY APPLICANTS FOR INTERFERENCE WITH PATENT (37 CFR § 1.607).


An early and favorable action on the merits is earnestly requested.

Respectfully submitted,

KENNETH (NMI) SCHOFIELD,
MARK L. LARSON and
KEITH J. VADAS

By: Van Dyke, Gardner, Linn
& Burkhart, LLP

Dated: November 16, 1999.

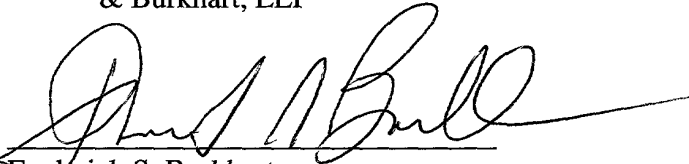
Frederick S. Burkhart
Registration No. 29 288
2851 Charlevoix Drive, S.E., Suite 207
Post Office Box 888695
Grand Rapids, Michigan 49588-8695
(616) 975-5500

TAF:tl
DON01 P-770

VEHICLE HEADLIGHT CONTROL USING IMAGING SENSORCROSS-REFERENCE TO RELATED APPLICATION

This application is a continuation-in-part of co-pending application Serial No. 08/023,918 filed February 26, 1993, by Kenneth Schofield and Mark Larson.

BACKGROUND OF THE INVENTION

This invention relates generally to vehicle control systems and, in particular, to a system and method for controlling the headlights of the vehicles. The invention is particularly adapted to controlling the vehicle's headlamps in response to sensing the headlights of oncoming vehicles and taillights of leading vehicles.

It has long been a goal to automatically control the state of a vehicle's headlights in order to accomplish automatically that which is manually performed by the driver. In particular, the driver of a vehicle whose headlights are in a high-beam state will dim the headlights upon conscious realization that the headlights are a distraction to the driver of an oncoming vehicle or a leading vehicle. It is desirable to relieve the driver of such duties and thereby allow the driver to concentrate on the driving task at hand. The ideal automatic control would also facilitate the use of high beams in conditions which allow their use, increasing the safety for the controlled vehicle as well as reducing the hazard caused by the occasional failure of the driver to dim the headlights when such headlights are distracting another driver.

Prior attempts at vehicle headlight dimming controls have included a single light sensor which integrates light in the scene forward of the vehicle. When the integrated light exceeds a threshold, the vehicle headlights are dimmed. Such approaches have been ineffective. The headlights of oncoming vehicles are, at least from a distance, point sources of light. In order to detect such light sources in an integrated scene, it is necessary to set a sufficiently low threshold of detection that many non-point-sources at lower intensities are interpreted as headlights or taillights. Such prior art vehicle headlight dimming controls have also been ineffective at reliably detecting the taillights of leading vehicles. The apparent reason is that the characteristics of these two light sources; for example, intensity, are so different that detecting both has been impractical. In order to overcome such deficiencies, additional solutions have been attempted, such as the use of infrared filtering, baffling of the optic sensor, and the like. While such modifications may have improved

performance somewhat, the long-felt need for a commercially useful vehicle headlight dimming control has gone unmet.

SUMMARY OF THE INVENTION

5 The present invention provides a vehicle control which is capable of identifying unique characteristics of light sources based upon a precise evaluation of light source characteristics made in each portion of the scene forward of the vehicle, in the vicinity of each light source, by separating each light source from the remainder of the scene and analyzing that source to determine its characteristics. One characteristic used in identifying a light source is the spectral characteristics of that source which is compared with spectral signatures of known light sources, such as those of headlights and taillights. Another characteristic used in identifying a light source is the spatial layout of the light source. By providing the ability to identify the headlights of oncoming vehicles and the taillights of leading vehicles, the state of the headlights of the controlled vehicle may be adjusted in response to the presence or absence of either of these light sources or the intensity of these light sources.

15 This is accomplished according to an aspect of the invention by providing an imaging sensor which divides the scene forward of the vehicle into a plurality of spatially separated sensing regions. A control circuit is provided that is responsive to the photosensors in order to determine if individual regions include light levels having a particular intensity. The control circuit thereby identifies particular light sources and provides a control output to the vehicle that is a function of the light source identified. The control output may control the dimmed state of the vehicle's headlamps.

20 In order to more robustly respond to the different characteristics of headlights and taillights, a different exposure period is provided for the array in order to detect each light source. In particular, the exposure period may be longer for detecting leading taillights and significantly shorter for detecting oncoming headlights.

25 According to another aspect of the invention, a solid-state light imaging array is provided that is made up of a plurality of sensors arranged in a matrix on at least one semiconductor substrate. The light-imaging array includes at least one spectral separation device, wherein each of the sensors responds to light in a particular spectral region. The control circuit responds to the plurality of sensors in order to determine if spatially adjacent regions of the field of view forward of the vehicle include light of a particular spectral signature above a particular intensity level. In this

US.
3/27/96

manner, the control identifies light sources that are either oncoming headlights ^{or} ~~are~~ leading taillights by identifying such light sources according to their spectral makeup.

According to another aspect of the invention, a solid-state light-imaging array is provided that is made up of a plurality of sensors that divide the scene forward of the vehicle into spatially separated regions, and light sources are identified, at least in part, according to their spatial distribution across the regions. This aspect of the invention is based upon a recognition that headlights of oncoming vehicles and taillights of leading vehicles are of interest to the control, irrespective of separation distance from the controlled vehicle, if the source is on the central axis of travel of the vehicle. Oncoming headlights and leading taillights may also be of interest away from this axis, or off axis, but only if the source has a higher intensity level and is spatially larger. These characteristics of headlights and taillights of interest may be taken into consideration by increasing the resolution of the imaging array along this central axis or by increasing the detection threshold off axis, or both. Such spatial evaluation may be implemented by selecting characteristics of an optical device provided with the imaging sensor, such as providing increased magnification central of the forward scene, or providing a wide horizontal view and narrow vertical view, or the like, or by arrangement of the sensing circuitry, or a combination of these.

The present invention provides a vehicle headlight control which is exceptionally discriminating in identifying oncoming headlights and leading taillights in a commercially viable system which ignores other sources of light including streetlights and reflections of the controlled vehicle's headlights off signs, road markers, and the like. The present invention further provides a sensor having the ability to preselect data from the scene forward of the vehicle in order to reduce the input data set to optimize subsequent data processing. The invention is especially adapted for use with, but not limited to, photoarray imaging sensors, such as CMOS and CCD arrays.

These and other objects, advantages, and features of this invention will become apparent upon review of the following specification in conjunction with the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a side elevation of a portion of a vehicle embodying the invention;

Fig. 2 is a partial side elevation view and block diagram of a vehicle headlight dimming control system according to the invention;

Fig. 3 is a block diagram of the control system in Fig. 2;

Fig. 4 is a layout of a light-sensing array useful with the invention;

Fig. 5 is a block diagram of an imaging sensor;

Fig. 6 is an alternative embodiment of an imaging sensor;

Figs. 7a-7d are a flowchart of a control program;

Figs. 8a-8c are spectral charts illustrating spectra regions useful with the invention;

Fig. 9 is the same view as Fig. 3 of another alternative embodiment;

Fig. 10 is the same view as Fig. 2 of an alternative mounting arrangement;

Figs. 11a-11c are views forward of a vehicle illustrating different forms of spatial filtering;

and

Figs 12a and 12b are illustrations of use of the invention to detect particular atmospheric conditions.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now specifically to the drawings and the illustrative embodiments depicted therein, a vehicle 10 includes a vehicle headlight dimming control 12 made up of an imaging sensor module 14 which senses light from a scene forward of vehicle 10, an imaging control circuit 13 which receives data from sensor 14, and a vehicle lighting control logic module 16 which exchanges data with control circuit 13 and controls headlamps 18 for the purpose of modifying the headlight beam (Figs. 1 and 2). Such control may be a binary control of the aim of the beam, such as by switching between lamps or lamp filaments, or may be a continuous variation of the aim of a single lamp more or less forward of the vehicle. The control may also control the intensity or pattern of the beam. Additionally, the lights of a vehicle equipped with daytime running lights may be switched between a daytime running light condition and a low-beam condition. Vehicle headlight dimming control 12 can perform a wide range of additional control operations on the vehicle, including turning the headlights ON and OFF, modifying the light intensity of the instrument panel, and providing an input to an electro-optic mirror system.

Vehicle lighting control logic module 16 receives an input 20 from imaging control circuit 13. In particular embodiments, such as ones which adjust the state of the headlights between continuously variable states, module 16 may supply data to imaging control circuit 13, such as the speed of the vehicle, which may be combined with the data sensed by imaging sensor 14 in establishing the state of headlights 18. In the illustrated embodiment, imaging sensor module 14

may be fixedly mounted in a housing 28 by a bracket 34 mounted to, or near, the vehicle's windshield 32. Bracket 34 also mounts an interior rearview mirror 30. This is a preferred mounting for imaging sensor module 14 because the location within the interior of the vehicle substantially eliminates environmental dirt and moisture from fouling the light sensor module. Additionally, the position behind windshield 32, which typically is kept relatively clear through the use of washers and wipers and the like, ensures a relatively clear view of the scene forward of vehicle 10. Alternatively, imaging sensor module 14 may be mounted within a housing 29 of interior rearview mirror 30 facing forward with respect to vehicle 10 (Fig. 10). In such embodiment, control circuit 13 may be combined with the circuit which controls the partial reflectance level of mirror 30 if mirror 30 is an electro-optic mirror such as an electrochromic mirror. Other mounting techniques for sensor module 14 will be apparent to the skilled artisan.

Imaging sensor module 14 includes an optical device 36, such as a lens, an array 38 of photon-accumulating light sensors, and a spectral separation device for separating light from the scene forward of vehicle 10 into a plurality of spectral bands, such as a filter array 40 disposed between optical device 36 and light-sensing array 38. Light-sensing array 38 is described in detail in co-pending application Serial No. 08/023,918 filed February 26, 1993, by Kenneth Schofield and Mark Larson for an AUTOMATIC REARVIEW MIRROR SYSTEM USING A PHOTSENSOR ARRAY, the disclosure of which is hereby incorporated herein by reference. Light-sensing array 36 includes a plurality of photosensor elements 42 arranged in a matrix of columns and rows (Fig. 4). In the illustrated embodiment, an array of 512 rows and 512 columns of light-sensing pixels, each made up of a photosensor element 42 is utilized. However, a greater or lesser number of photosensor elements may be utilized and may be arranged in matrix that is laid out in other than columns and rows. Each photosensor element 42 is connected to a common word-line 44. To access the photosensor array, a vertical shift register 46 generates word-line signals to each word-line 44 to enable each row of photosensor elements 42. Each column of photosensor elements is also connected to a bit-line 48 which is connected to an amplifier 50. As each word-line 44 is accessed, a horizontal shift register 52 uses a line 54 to output the bit-line signals on consecutive bit lines 48 to an output line 56. In this manner, each photosensor element 42 may be individually accessed by appropriate manipulation of shift registers 46 and 52. Output 56 is supplied to a digital signal processor 13 which is supplied on an output 62 as input to control circuit 13 (Figs. 3-5).

5 Digital signal processor 13 includes an analog-to-digital converter 58 which receives the output 56 of array 36 and converts the analog pixel values to digital values. A digital output 68 of A/D converter 58 is supplied to a taillight detection circuit 76, a headlight detection circuit 78, and to ambient sense logic circuit 84. A detection control circuit 72 supplies control and timing signals on a line 74 which is supplied to array 38, A/D converter 58 taillight detection circuit 76, headlight detection circuit 78, and ambient sense logic 84. Such signals coordinate the activities of these modules and provide any data, from look-up tables provided in control circuit 72, needed by each circuit to perform its function. For example, control circuit 72 may provide intensity threshold levels to taillight detection circuit 76 and headlight detection circuit 78.

10 Taillight detection circuit 76 detects a red light source having an intensity above a particular threshold as follows. For each pixel that is "red," a comparison is made with adjacent "green" pixels and "blue" pixels. If the intensity of a red pixel is more than a particular number of times the intensity of the adjacent green pixel and adjacent blue pixel, then it is determined that the light source is red. If the intensity of the "red" light source is greater than a particular threshold, an indication is provided at 80.

15 Headlight detection circuit 78 detects a white light source having an intensity above a particular threshold as follows. A white light is a combination of red, green, and blue components. If adjacent "red," "green," and "blue" pixels all exceed a particular threshold, a ratio comparison is made of the pixels. If the ratio of the intensity of the adjacent "red," "green," and "blue pixels is within a particular range, such as 20 percent by way of example, then a white light source is detected.

20 Vehicle headlight dimming control 12 additionally includes an ambient light-sensing circuit 84 which receives an input from digital output signal 68. Ambient detection circuit 84 samples a subset of photosensor elements and detects light levels sensed by the subset over a long period of time in order to produce significant time filtration. Preferably, the photosensor elements in the sensed subset include sensors that detect portions of the forward-looking scene that are just above the earth's horizon which is more indicative of the ambient light condition. Ambient detection circuit 84 produces an indication 88 of ambient light levels which is supplied as an input to a lighting control module 90. A high ambient light level may be used by a module 90 to inhibit headlight actuation or to switch headlights 18 to a daytime running light mode. Ambient detection

circuit 84 can, optionally, perform other functions, such as switching the daytime running lights of the vehicle between daytime and nighttime modes, controlling the intensity of the vehicle's instrument panel and providing an input to an electro-optic rearview mirror system.

Indications 80 and 82 from the light detection units and indication 88 from ambient detection circuit 84 are supplied to a lighting control circuit 90 which produces a first indication 92 that headlights 18 are to be switched on, or switched from a daytime running condition to a night mode, and a high-beam enable indication 94 that the headlights may be switched to a high-beam state. Vehicle lighting control logic module 16 responds to indications 92 and 94 by switching headlights 18 to an appropriate mode. An output 96 from module 16 may be provided to supply lighting control circuit 90 with information with respect to vehicle telemetry, steering, speed, and any other parameter that may be incorporated into the algorithm to determine the state of the headlights of the vehicle. Digital signal processor 13 may be implemented using discrete digital circuit modules or with a suitably programmed micro-processor with input and output buffers.

In one embodiment, an imaging sensor module 14a includes a single photosensor array 38a, one spectral filter array 40a, and one optical device 36a (Fig. 5). In this illustrated embodiment, spectral filter array 40a includes alternating spectrum filter elements for exposing adjacent pixels to different regions of the electromagnetic spectrum in the red band or green band or blue band. This may be accomplished by arranging such filter elements in stripes or by alternating filter spectral regions in a manner known in the art. Digital signal processor 13a captures a frame of data by enabling photosensor array 38a for a particular exposure period during which each photosensor element 42 accumulates photons. In order to detect oncoming headlights, digital signal processor 13a enables photosensor array 38a for a first exposure period. In order to detect leading taillights, digital signal processor 13a enables photosensor array 38a for a second exposure period. Because oncoming headlights have an intensity level that is substantially greater than that of leading taillights, the exposure period of the frame in which leading taillights is detected is at least approximately ten times the length of the exposure period during which oncoming headlights are detected. Most preferably, the exposure period for detecting leading taillights is approximately 40 times the exposure period for detecting oncoming headlights. In the illustrated embodiment, an exposure period of 0.004 seconds is utilized for detecting taillamps and 0.0001 seconds for detecting oncoming headlamps. The exposure period is the time during which each photosensor

element 42 integrates photons before being read and reset by digital signal processor 13a.

Establishing a different exposure period for detecting headlights verses taillights facilitates the use of existing and anticipated sensor technology by accommodating the dynamic range of such sensor technology. Exposure may also be adaptively established on a priority basis. In one such embodiment, exposure is set to a shorter headlight setting. If headlights are detected, the headlights 18 of vehicle 10 are dimmed and the exposure period is kept short. If no headlights are detected, the next frame is set to a longer exposure period. This has the advantage of shorter system cycle time as well as a reduction in sensitivity to sensor saturation and blooming. In another such embodiment, the exposure period is initially set to a long period. If an oncoming headlight is tentatively detected, the exposure period could then be switched to a short period to confirm the observation.

Vehicle headlight dimming control 12 carries out a control routine 100 (Figs. 7a-7d). At the beginning of each pass through the routine, which occurs for every frame captured by the imaging sensor, a frame is grabbed at 102 and all of the pixels in the frame are processed as follows. Counters used for detecting white headlight sources and red taillight sources are zeroed at 104. It is then determined at 106 whether the previously processed frame was for detecting headlights or taillights. This is determined by looking at a variable "process.tails" which will be set to "yes" if the previous frame was processed to detect headlights and will be set to "no" if the previous frame was processed to detect taillights. If it is determined at 106 that the variable "process.tails" is set to "yes," the control proceeds to 108 in order to process the next frame to detect taillights. If it is determined at 106 that the variable process.tails is set to "no," then control passes to 109 in order to process the next frame as a headlight detecting frame.

The taillight detecting frame process begins at 108 by setting the exposure period for the imaging sensor module to grab the next frame according to a headlamp exposure level. In the illustrated embodiment, the exposure period for detecting headlights is set at 0.0001 seconds.

Processing of the taillight frame proceeds at 110 by examining, for each "red" pixel, whether the intensity of light sensed by that pixel is greater than a threshold and whether the intensity of light sensed by that pixel is greater than a selected number of multiples of the intensity of light sensed by an adjacent "blue" pixel and a selected number of multiples of the intensity of light sensed by an adjacent "green" pixel. If so, then a "red" counter is incremented at 114. Preferably, the ratio of red pixel intensity to green or blue pixel intensity is selected as a power of 2 (2, 4, 8, 16 . . .) in order to

ease digital processing. However, other ratios may be used and different ratios can be used between red/green and red/blue pixels. In the illustrated embodiment, a ratio of 4 is selected based upon ratios established from CIE illuminant charts known to skilled artisans. Based upon these charts, a ratio greater than 4 would provide greater discrimination. Such greater discrimination may not be desirable because it could result in failure to identify a leading taillight and, thereby, a failure to dim the headlights of the controlled vehicle. After all pixels have been processed, the parameter "process.tails" is set to "no" at 116 and control proceeds to 118 (Fig. 7c).

In a similar fashion, processing of a headlight frame begins at 110 by setting the exposure period for the imaging sensor module to grab the next frame as a red taillight detecting frame. This is accomplished by setting the exposure period of the imaging sensor module to 0.004 seconds. It is then determined at 120 for each pixel whether an adjacent set of "red," "green," and "blue" pixels each exceeds a particular threshold and whether the pixel intensity levels all fall within a particular range, such as within 20 percent of each other. If all of the red, green, and blue pixels exceed a threshold and pass the ratio test, then it is determined that a white light source is being sensed and a "white" counter is incremented at 122. After all of the pixels in the frame have been processed, the process.tails flag is set to a "yes" state at 124. Control then passes to 118.

It is determined at 118 whether both the "white" and the "red" counters are below respective high-beam thresholds. If so, a high-beam frame counter is incremented and a low-beam frame counter is set to zero at 120. If it is determined at 118 that both the "white" and the "red" counters are not less than a threshold, it is then determined at 126 whether either the "red" counter or the "white" counter is greater than a respective low-beam threshold. If so, the high-beam frame counter is set to zero and the low-beam frame counter is incremented at 128. If it is determined at 126 that neither the "red" counter or the "white" counter is greater than the respective low-beam threshold, then both the high-beam frame counters and the low-beam frame counters are set to zero at 130.

Control then passes to 132 where it is determined if the low-beam frame counter is greater than a particular threshold. If so, high-beam enable signal 94 is set to a "low-beam" state at 134. Additionally, the low-beam frame counter is set to the threshold level. If it is determined at 132 that the low-beam frame counter is not greater than its threshold, it is determined at 136 whether the high-beam frame counter is greater than its threshold. If so, high-beam enable signal 94 is set to "high-beam" state at 138 and the high-beam frame counter is reset to its threshold level.

Control routine 100 provides hysteresis by requiring that a headlight spectral signature or a taillight spectral signature be detected for a number of frames prior to switching the headlights to a low-beam state. Likewise, the absence of a detection of an oncoming headlight or a leading taillight must be made for multiple frames in order to switch from a low-beam to a high-beam state. This hysteresis guards against erroneous detection due to noise in a given frame and eliminates headlamp toggling when sources are at the fringe of detection range. In the illustrated embodiment, it is expected that a vehicle headlight control system 12 will respond to a change in the state of light sources in the forward field of view of the vehicle in less than 0.5 seconds. An additional level of hysteresis may be provided by forcing the headlamps to stay in a low-beam state for a given number of seconds after a transition from high beams to low beams. The reverse would not occur; namely, holding a high-beam state for a particular period to avoid annoyance to drivers of oncoming or leading vehicles.

In the illustrated embodiment, red light sources, which have the spectral signature and intensity of taillights, are detected by determining that a "red" pixel, namely a pixel which is exposed to light in the visible red band, is both greater than a given multiple of the "green" and "blue" adjacent pixels, as well as being greater than a threshold and that white light sources, which are the spectral signatures of headlights, are detected by determining that "red," "green," and "blue" pixels are both within a particular intensity range of each other as well as being greater than a threshold. This double-testing helps to reduce false detection of light sources. However, it would be possible to detect red light sources only by looking at the intensity of "red" pixels and to detect white light sources by determining that an adjacent set of "red," "blue," and "green" pixels are all above a particular threshold.

In the illustrated embodiment, spectral filtering is carried out in a manner which exposes each photosensing element in the photosensor array to a band of light falling within one of the primary ranges of the visible spectrum, namely red, green, or blue as illustrated in Fig. 8a. However, different bands in the frequency spectrum may be utilized including not only visible spectrum bands but invisible spectrum bands including infrared and ultraviolet bands as illustrated in Fig. 8b. The band selection could also be chosen from visible spectral regions that do not correspond with the primary spectrums. For example, the spectral filter may be selected in order to detect at the pixel level red light sources and the compliment of red light sources as illustrated in

Fig. 8c. These binary indications could be utilized to detect red taillights by determining that the "red" pixel is greater than a threshold and greater than a number of multiples of the intensity sensed by the "red compliment" pixel adjacent thereto. Likewise, a white light source indicative of oncoming headlights could be detected by determining that both the "red" pixel and the "red compliment" pixel adjacent thereto are both above a particular threshold and within a particular intensity range of each other. It may also be desirable to select bands that fall between primary spectrum regions or any other bands that may be desirable for a particular application.

Photosensing array 38 may be a charge couple device (CCD) array of the type commonly utilized in video camcorders and the like. Alternatively, photosensing array 38 could be a CMOS array of the type manufactured by VLSI Vision Ltd. (VVL) in Edinburgh, Scotland. Additionally, a hybrid of the CCD and CMOS technology may be employed. Other potentially useful photosensing technologies include CID, MOS, photo diodes, and the like.

In an alternative embodiment, an imaging sensor module 14b includes two or more pairs of photosensor arrays 38b (Fig. 6). Each photosensor array 38b has an associated spectral filter array 40b and optical device 36b. In this embodiment, each array 38b is operated by digital signal processor 58b to have an exposure period that is set for detecting either oncoming headlights or leading taillights. In this manner, each frame of the scene captured by each array is utilized to detect a particular light source. This is in contrast to light-sensing module 14a in Fig. 5 in which each light source is detected in alternating frames. Each spectral filter 40b is identical, whereby each array 38b is capable of detecting light sources having spectrum composition including red, green, and blue regions of the spectrum. However, the spectral filters may be custom configured to the particular application. This may result in a homogeneous composition or a more complex mosaic, especially where light sources are examined in three or more spectral regions.

In yet an additional single lens system embodiment, an imaging sensor module 14c includes three light-sensing arrays (not shown) and a spectral separation device overlying the light-sensing arrays which directs spectral bands to different arrays (Fig. 9). An example of such spectral separation device is a refracting optical splitter, such as dichroic mirrors ^{or} ~~or~~ prisms. In this manner, each light-sensing array detects light in either the red or green or blue region of the spectrum. As such, imaging sensor module 14c produces three output signals on a line 64, each representing detected light in one of the red or green or blue spectral regions. The output signals on line 64

U.S.
3/22/96

include frame-timing signals which are decoded by digital acquisition circuits 66 which produces a digital output signal 68' indicative of intensity levels of adjacent red, green, and blue pixels. Digital acquisition circuit 66 additionally produces a timing signal output 70 which is utilized by a detection control circuit 72 in order to supply synchronizing signals, at 74, to imaging sensor module 14c and digital acquisition circuit 66. A control and timing signal 86 is produced by digital acquisition circuit 66 and supplied to detection circuits 76 and 78 and ambient detection circuit 84 in order to enable the circuits to distinguish between subsequent frames captured by the light-sensing modules. As with previously described embodiments, digital output signal 68' is supplied to taillight detection circuit 76, headlight detection circuit 78, and ambient sense logic circuit 84.

The present invention is capable of identifying point sources of light in any particular location within the scene viewed forward of the vehicle. Additional discrimination between oncoming headlights and leading taillights may be accomplished by taking into account the relative location of the source of light within the scene. For example, as best seen by reference to Fig. 11a, particular relationships have been discovered to exist between light sources of interest and their spatial location forward of the vehicle. Oncoming headlights and leading taillights of interest can be characterized, at least in part, based upon their displacement from the central axis of the vehicle. On-axis light sources of interest can be at both close and far away separation distances. However, off-axis light sources may only be of interest if at a close separation distance from the vehicle. Assuming for illustration purposes that headlights and taillights are of the same size, headlights and taillights of interest occupy an increasing spatial area as they move off axis. Therefore, the resolution required to detect lights of interest may decrease off axis. Additionally, the fact that close-up off-axis light sources have significant spatial area would allow image-processing techniques to be employed to discriminate between close-up off-axis light sources of interest and distant off-axis light sources, which are not of interest. This may be accomplished through customized optics or other known variations in pixel resolution. Furthermore, headlights and taillights of interest are of greater intensity, because of their closeness, off axis. This allows an increase in intensity detection thresholds off axis without missing detection of such light sources. This increase in detection threshold and reduction in resolution off axis assists in avoiding false detection of light sources not of interest, such as a streetlights, building lights, and the like.

In order to take into account this spatial differentiation, the present invention comprehends detecting light sources at a lower threshold centrally of the scene and at a higher threshold at the periphery of the scene. This may be accomplished either optically, or electronically, or both. Optically, this may be accomplished by providing a non-uniform magnification to optical device 36. For example, an optical device may have optical magnification at a central portion thereof and an optical attenuation at a peripheral region thereof. Additionally, optical device 36 may have a relatively wide horizontal field of view and a relatively narrow vertical field of view. The narrow vertical field of view would tend to reduce the detection of street lights and other overhead light sources. In a preferred embodiment, optical device 36 is a lens that is made from injection-molded plastic. Electronically, such spatial differentiation may be accomplished by establishing a higher threshold level for pixel intensity detection for pixels located at the periphery of the scene than for pixels located centrally of the scene. This would cause centrally positioned light sources to be detected at a lower intensity level than sources detected at the periphery of the scene. Such spatial differentiation could also be accomplished by a non-symmetrical mapping of light to the sensor array, as illustrated in Fig. 11b, or by masking portions 98a, 98b, and 98c, at the periphery of the scene, as illustrated in Fig. 11c, so that these portions are not sensed at all. Spatial differentiation could also be accomplished by providing non-uniform pixel size.

The present invention is exceptionally sensitive to sources of light having spectral signatures of oncoming headlights and leading taillights. By recognizing the spectral signature of the light sources, many non-relevant light sources may be ignored. By examining light sources pixel-by-pixel, relatively small light sources may be detected at great distances in order to dim the headlights well before they become a nuisance to the driver of the vehicle ahead of the control vehicle. This is accomplished, according to a preferred embodiment, by utilizing an imaging sensor made up of an array of photosensing elements in a compact design which responds to light sources in a scene forward of the vehicle. Furthermore, such sensor preferably utilizes digital processing techniques which are well adapted for use with custom digital electronic circuitry, avoiding the expense and speed constraints of general purpose programmable microprocessors.

The present invention takes advantage of the spectral signatures both of light sources which must be detected in a headlight dimming control as well as the spectral signatures of light sources which must be rejected in a headlight dimming control. For example, federal regulations establish

specific spectral bands that must be utilized in vehicle taillights; namely red. Furthermore, federal legislation prohibits the use of red light sources in the vicinity of a highway. Lane markers, signs, and other sources of reflected light are all specified in a manner which may be readily identified by spectral signature. Oncoming headlights, according to known technology, have a visible spectral signature which is predominantly white light. As light source technology evolves, the present invention facilitates detection of other spectral signatures of light sources in the future.

The present invention is capable of utilizing spatial filtering to even further enhance the ability to identify light sources. By spatial filtering is meant consideration of not only whether a particular pixel, or pixel group, is detecting a light source having a particular spectral signature, but also what adjacent, or closely related, pixels or pixel groups, are detecting. For example, it can be concluded that very closely adjacent red and white light sources are not of interest as oncoming headlights or taillights. An example where such pattern could be observed is a streetlight observed with a system having imperfect color correction, which can produce a white light surrounded by a red halo. By evaluation of adjacent pixel groups, a closely proximate red light source and white light source can be identified as a streetlight and not either a headlight or a taillight.

Pattern recognition may be used to further assist in the detection of headlights, taillights, and other objects of interest. Pattern recognition identifies objects of interest based upon their shape, reflectivity, luminance, and spectral characteristics. For example, the fact that headlights and taillights usually occur in pairs could be used to assist in qualifying or disqualifying objects as headlights and taillights. By looking for a triad pattern, including the center high-mounted stoplight required on the rear of vehicles, stoplight recognition can be enhanced. Furthermore, object recognition can be enhanced by comparing identified objects over successive frames. This temporal processing can yield information on object motion and can be used to assist in qualifying or disqualifying objects of interest.

Spatial filtering can also be useful in identifying atmospheric conditions by detecting effects on light sources caused by particular types of atmospheric conditions. One such atmospheric condition is fog. A bright light source 102 is surrounded by a transition region 104 between the intensity of the light source and the black background (Fig. 12a). Fog, or fine rain, tends to produce a dispersion effect around light sources which causes a series of transition regions 104a, 104b . . . 104n which extend further from the light source (Fig. 12b). By placing appropriate limits on the

size of the transition region, fog or light rain, or a mixture of both, or other related atmospheric conditions, can be detected. In response to such atmospheric conditions, vehicle headlight dimming control 12 may activate fog lights, inhibit switching to high beams, or perform other control functions. Furthermore, fog, or fine rain, can be detected, or confirmed, by analyzing the effects of headlights 18 in the forward scene as reflected off of moisture particles.

Spatial filtering can also be used to detect rain on windshield 32. This may be accomplished by performing statistical analyses between a pixel, or pixel group, and adjacent pixels or pixel groups. A view forward of a vehicle through a dry windshield would be sensed by an imaging sensor module as continuously varying differences between adjacent pixels, or pixel groups, assumed to be under constant illumination from light sources. When, however, a droplet of water or a snowflake is on windshield 32, an effect is created which causes a lack of continuous variation of differences between adjacent pixels, or pixel groups. This has the tendency to reduce the first derivative of the pixel, a condition which can be determined by processing.

Processing can be used to determine the first derivative of an image captured by image-sensing module 14 by determining a measure of the entropy, or disarray, of a pixel, or pixel group, with respect to its neighbors. For example, an approximation of the first derivative for a pixel is:

$$\frac{d(P_i)}{dxy} = \frac{\sqrt{\sum_{j=1}^n (P_i - P_j)^2}}{N}$$

where N=8 and

where P_i is a given pixel and P_j is one of 8 neighboring pixels.

It should be apparent to those skilled in the art that the invention is capable of performing control functions other than controlling the dimming of the vehicle's headlights. For example, spectral signature identifications may be utilized to detect the state of a traffic light to either warn the driver that a light has changed from green to yellow to red or to automatically decelerate and

stop the vehicle. Also, by sensing that the intensity of a leading taillight has abruptly increased, a condition where the leading vehicle is braking may be identified and suitable action taken.

The invention may be utilized to identify particular traffic signs by their spectral signature as well as their geometric organization. For example, red octagons may be identified as stop signs, yellow triangles as caution signs, and the like. These capabilities are a result of the present invention providing a significant reduction in the amount of data to be processed because the image forward of the vehicle is captured in a manner which preselects data. Preselection of data is accomplished by configuring the sensor array, including the optics thereof, to consider the spatial, as well as the spectral, characteristics of light sources.

The present invention may be used to determine the environment in which the vehicle is operated. For example, a high level of "non-qualified" light sources; namely, light sources that are not headlights or taillights, as well as "qualified" light sources can be used to determine a measurement of the activity level around the vehicle; namely, that the vehicle is in an urban environment which may be a useful input for particular control algorithms. This may be accomplished as follows. An activity counter is established which represents a total number of pixels, or pixel groups, whose red, green, or blue components exceed a threshold. The threshold is set to a relatively low value, namely just above the noise floor. This counter, which registers any real detected source, is reset and retabulated every frame, preferably during the exposure period for detecting taillights. If the activity counter exceeds a particular value, then a high activity environment is detected. One use of this information would be to inhibit the control from switching the vehicle's headlights from a low-beam state to a high-beam state unless a low activity condition exists for awhile. The activity counter may be used by the control in combination with a low-beam duration counter which records the number of frames that the system has been in a low-beam state. It is reset upon system power-up and at every transition from the high-to-low beam states. The control may be inhibited from switching the vehicle's headlights to the high-beam state unless either the low-beam duration counter exceeds a value or the activity counter indicates a sustained low activity condition.

The present invention can be used to detect lane markers in order to either assist in steering the vehicle or provide a warning to the driver that a lane change is occurring. The capability of the

invention to detect rain on the vehicle's windshield could be used to control the vehicle's wipers both between OFF and ON conditions and to establish a frequency of intermittent operation.

Changes and modifications in the specifically described embodiments can be carried out without departing from the principles of the invention which is intended to be limited only by the scope of the appended claims, as interpreted according to the principles of patent law including the doctrine of equivalents.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A vehicle headlamp control, comprising:
an imaging sensor that senses light in spatially separated regions of a field of view forward of a vehicle; and
a control circuit that is responsive to said imaging sensor in order to determine if individual regions of the field of view include light levels having a particular intensity level in order to identify light sources of interest and provide a control output to said vehicle that is a function of the identification of light sources of interest.
2. The vehicle headlamp control in claim 1 including an exposure control which determines an accumulation period of time said imaging sensor senses light.
3. The vehicle headlamp control in claim 2 wherein said exposure control defines at least two accumulation periods, one of said accumulation periods for detecting oncoming vehicle headlights and another of said accumulation periods for detecting leading vehicle taillights.
4. The vehicle headlamp control in claim 1 wherein said control circuit includes a digital processor which provides a digital value of the sensed light level of each region.
5. The vehicle headlamp control in claim 1 wherein said imaging sensor includes a photosensor array.
6. The vehicle headlamp control in claim 5 wherein said imaging sensor includes a spectral separation device for dividing said photosensors into sensors which are each responsive to a particular spectral region.

1 7. The vehicle headlamp control in claim 6 wherein said spectral separation device divides said
photosensors into red, green, and blue sensors which sense light in either a red, a green, or a blue
portion of the spectrum.

1 8. The vehicle headlamp control in claim 6 wherein said spectral separation device divides said
photosensors into red and red compliment sensors which sense light in either a red portion of the
spectrum or a portion of the spectrum that is outside said red portion of the spectrum.

1 9. The vehicle headlamp control in claim 1 wherein said imaging sensor includes an optical
device.

1 10. The vehicle headlight control in claim 9 wherein said optical device produces a higher
resolution along an axis of vehicle travel than a resolution off of said axis.

1 11. The vehicle headlamp control in claim 1 wherein said control circuit switches the vehicle
headlights between high-beam and low-beam states.

1 12. The vehicle headlamp control in claim 1 wherein said control circuit controls the vehicle
headlights along a continuously variable value.

1 13. A vehicle headlight control, comprising:
a solid-state light sensor array made up of a plurality of sensors arranged in a matrix on at
least one semiconductor substrate and a spectral separation device to apply particular spectral
regions to particular ones of said sensors, wherein each of said sensors responds to light in a
particular spectral region;

5 an optical device for directing light onto said sensor array in a manner which preserves
spatial separation of light sources forward of the vehicle; and

a control circuit that is responsive to said plurality of sensors in order to determine if
spatially adjacent one or ones of said sensors are sensing light of a particular spectral signature

above a particular intensity level in order to identify light sources that are either oncoming headlights or leading taillights to thereby control the vehicle headlights.

1 14. The vehicle headlamp control in claim 13 wherein said control circuit selects a first light exposure period for at least a portion of said array in order to detect oncoming headlights and a second light exposure period for at least a portion of said array in order to detect leading taillights.

1 15. The vehicle headlamp control in claim 14 wherein the same portion of said array senses oncoming headlights and leading taillights and said first and second light exposure periods are sequentially varied.

1 16. The vehicle headlamp control in claim 14 wherein different portions of said array sense oncoming headlights and leading taillights and each of said portions has one of said light exposure periods.

1 17. The vehicle headlamp control in claim 14 wherein the length of said second light exposure is at least ten times the length of said first light exposure.

1 18. The vehicle headlamp control in claim 17 wherein the length of said second light exposure is at least approximately 40 times the length of said first light exposure.

1 19. The vehicle headlamp control in claim 13 wherein said optical device produces a higher resolution along an axis of vehicle travel than a resolution off of said axis.

1 20. The vehicle headlamp control in claim 19 wherein said optical device has a magnification that is greater centrally of its field of view than at the periphery of its field of view.

1 21. The vehicle headlamp control in claim 13 including an ambient light detector which enables said control circuit during low ambient light conditions.

- 1 22. The vehicle headlamp control in claim 21 wherein said ambient light detector includes a portion of said sensors that are time-filtered in order to sense long duration changes in sensed light levels.
- 1 23. The vehicle headlamp control in claim 22 wherein said portion of said sensors are positioned on said array to receive light from sources close to the earth's horizon.
- 1 24. The vehicle headlight control in claim 13 wherein particular ones of said sensors respond to red light in generally a red spectral region and particular ones of said sensors respond to non-red light in a spectral region other than said red spectral region.
- 1 25. The vehicle headlight control in claim 24 wherein said control circuit detects leading taillights by determining that at least one of said red light responsive sensors is sensing a light level that is greater than a particular multiple of light sensed by at least one adjacent non-red light responsive sensor and that light level is greater than a particular threshold.
- 1 26. The vehicle headlight control in claim 24 wherein said control circuit detects oncoming headlights by determining that at least one of said red light responsive sensors and at least one adjacent non-red light responsive sensors are both sensing light levels within a particular ratio of each other and greater than a particular threshold.
- 1 27. The vehicle headlight control in claim 13 wherein said control circuit determines if a particular light source has a particular spectral signature by comparing levels of light sensed by sensors which respond to light in a particular spectral region with levels of light sensed by sensors which respond to light in a different spectral region.
- 1 28. The vehicle headlight control in claim 13 wherein said control circuit determines if a particular light source has a particular spectral signature by comparing levels of light sensed by sensors which respond to light in a particular spectral region with a threshold.

- 1 29. The vehicle headlight control in claim 28 wherein said threshold is a function of the spatial location of the particular sensor in the array.
- 1 30. The vehicle headlight control in claim 29 wherein said threshold is higher for sensors sensing light off a central forward axis of the vehicle than for sensors sensing light along said axis.
- 1 31. The vehicle headlight control in claim 28 wherein said control circuit determines if a particular light source has a particular spectral signature by comparing levels of light sensed by sensors which respond to light in a particular spectral region with levels of light sensed by sensors which respond to light in a different spectral region.
- 1 32. The vehicle headlight control in claim 13 wherein said solid-state light sensor and said optical device are positioned in a housing behind the vehicle's windshield.
- 1 33. The vehicle headlight control in claim 32 wherein said housing is behind a portion of the vehicle's windshield swept by wipers.
- 1 34. The vehicle headlight control in claim 33 wherein said housing is mounted to a bracket supporting a rearview mirror.
- 1 35. The vehicle headlight control in claim 32 wherein said housing is an interior mirror housing.
- 1 36. A method of detecting light sources of interest forward of a vehicle in order to control the headlights of that vehicle, including:
- 5 providing a solid-state photosensor array made up of a plurality of sensors arranged in a matrix and mapping particular spatially arranged portions of a field of view forward of the vehicle onto said array in a manner which generally preserves the spatial arrangement of the field of view;
- restricting light received by each sensor to a particular spectral region so that each sensor responds to light having a particular spectral range; and

evaluating light levels sensed by each sensor in order to establish a spectral signature of light sources in said field of view in order to identify light sources of interest in said field of view.

1 37. The method in claim 36 wherein said comparing includes exposing at least a portion of said sensors for a first exposure period in order to identify spectral signatures of headlights and exposing at least a portion of said sensors for a second exposure period in order to identify spectra signatures of taillights.

1 38. The method in claim 36 further including reading individual light intensity levels of each of said sensors.

1 39. The method in claim 38 including digital processing of said individual light intensity levels.

1 40. The method in claim 39 including digital processing using custom digital circuitry.

1 41. The method in claim 36 wherein said directing light includes a non-linear mapping of the field of view forward of the vehicle onto said array.

1 42. The method in claim 36 wherein said mapping includes masking portions of the field of view forward of the vehicle.

1 43. The method in claim 36 wherein said comparing light levels includes comparing light levels with thresholds, said thresholds being different for particular ones of said sensors.

1 44. The method in claim 43 wherein said thresholds are greater off a central forward axis of the vehicle than on said axis.

1 45. A method of detecting light sources of interest forward of a vehicle in order to control the headlights of that vehicle, including:

providing a solid-state photosensor array made up of a plurality of sensors arranged in a matrix and mapping particular spatially arranged portions of a field of view forward of the vehicle onto said array in a manner which generally preserves the spatial arrangement of the field of view; evaluating light levels detected by each sensor in order to identify light sources of interest at least in part as a function of a spatial distribution of each light source in said field of view.

46. The method in claim 45 wherein said evaluating includes establishing a different sensing resolution along an axis of vehicle travel than off of said axis.

47. The method in claim 46 wherein the sensing resolution along said axis is greater than off of said axis.

48. The method in claim 45 including providing an optic device which provides a non-uniform magnification of said field of view.

49. The method in claim 45 wherein said solid-state photosensor array has sensor sizes which are non-uniform in said matrix.

50. The method in claim 45 wherein said identifying light sources of interest includes determining if each sensor is sensing a light level above a threshold level.

51. The method in claim 50 wherein said threshold is non-uniform for said sensors.



52. The method in claim 51 wherein said threshold is lower for sensors sensing portions of said field of view along an axis of vehicle travel than for sensors sensing a portion of said field of view off of said axis.


53. The method in claim 45 including restricting light received by each sensor to a particular spectral region so that each sensor responds to light having a particular spectral range.



VEHICLE HEADLIGHT CONTROL USING IMAGING SENSOR

ABSTRACT OF THE DISCLOSURE

A vehicle headlamp control method and apparatus includes providing an imaging sensor that senses light in spatially separated regions of a field of view forward of the vehicle. Light levels sensed in individual regions of the field of view are evaluated in order to identify light sources of interest, such as oncoming headlights and leading taillights. The vehicle's headlights are controlled in response to identifying such particular light sources or absence of such light sources. Spectral signatures of light sources may be examined in order to determine if the spectral signature matches that of particular light sources such as the spectral signatures of headlights or taillights. Sensed light levels may also be evaluated for their spatial distribution in order to identify light sources of interest.

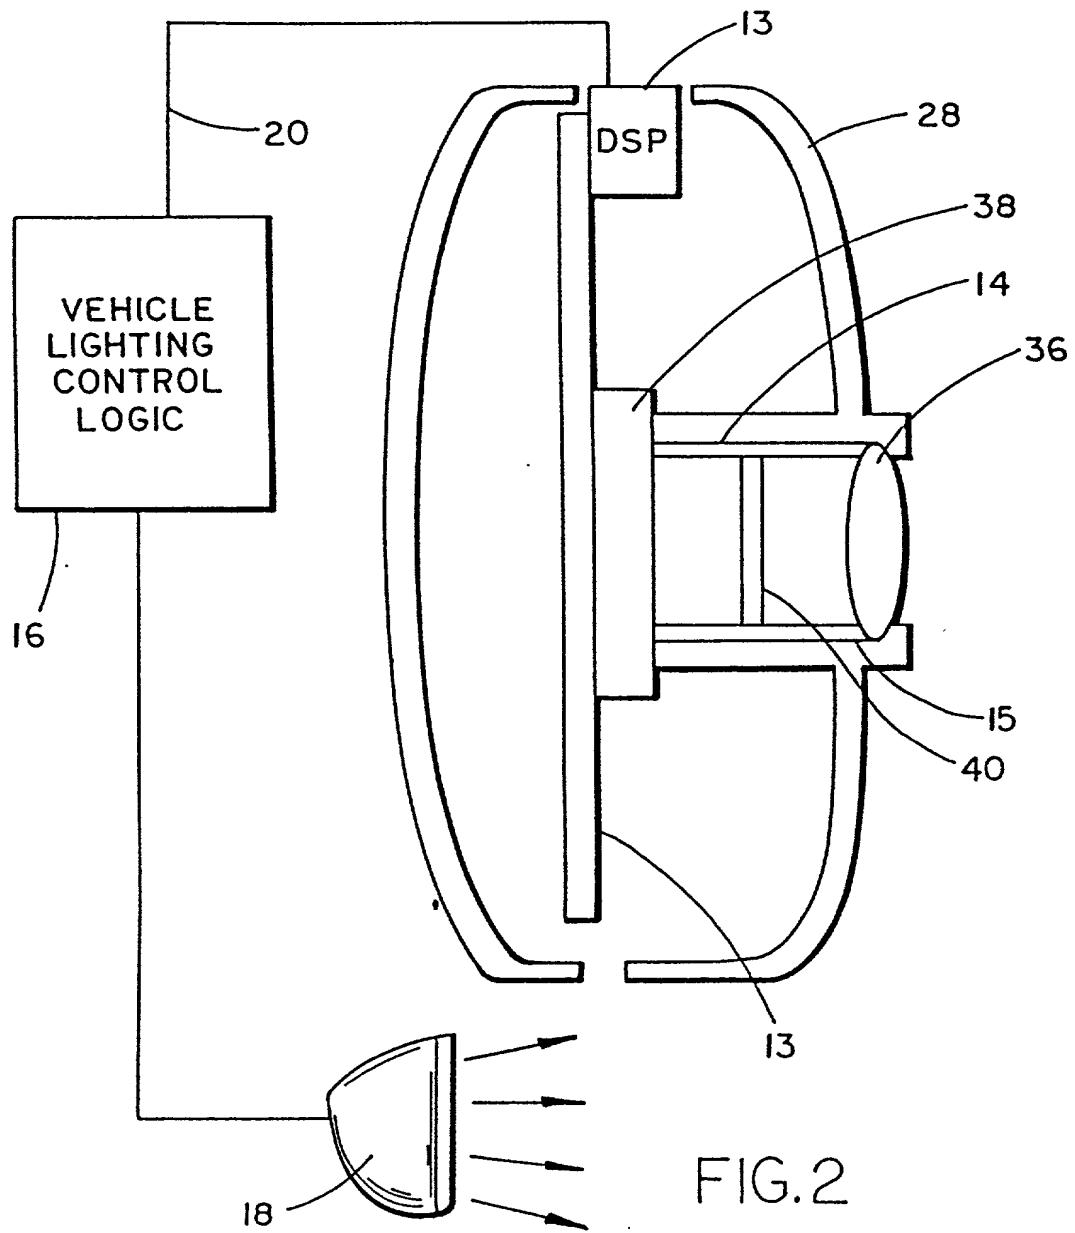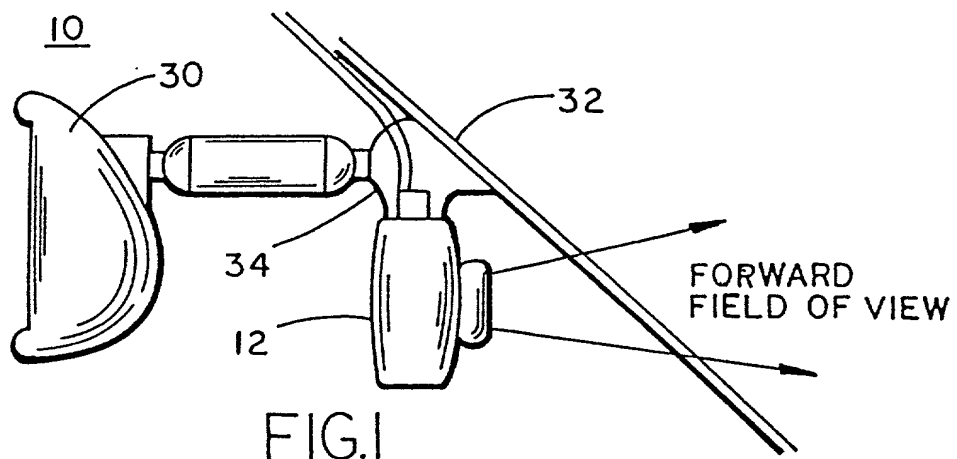

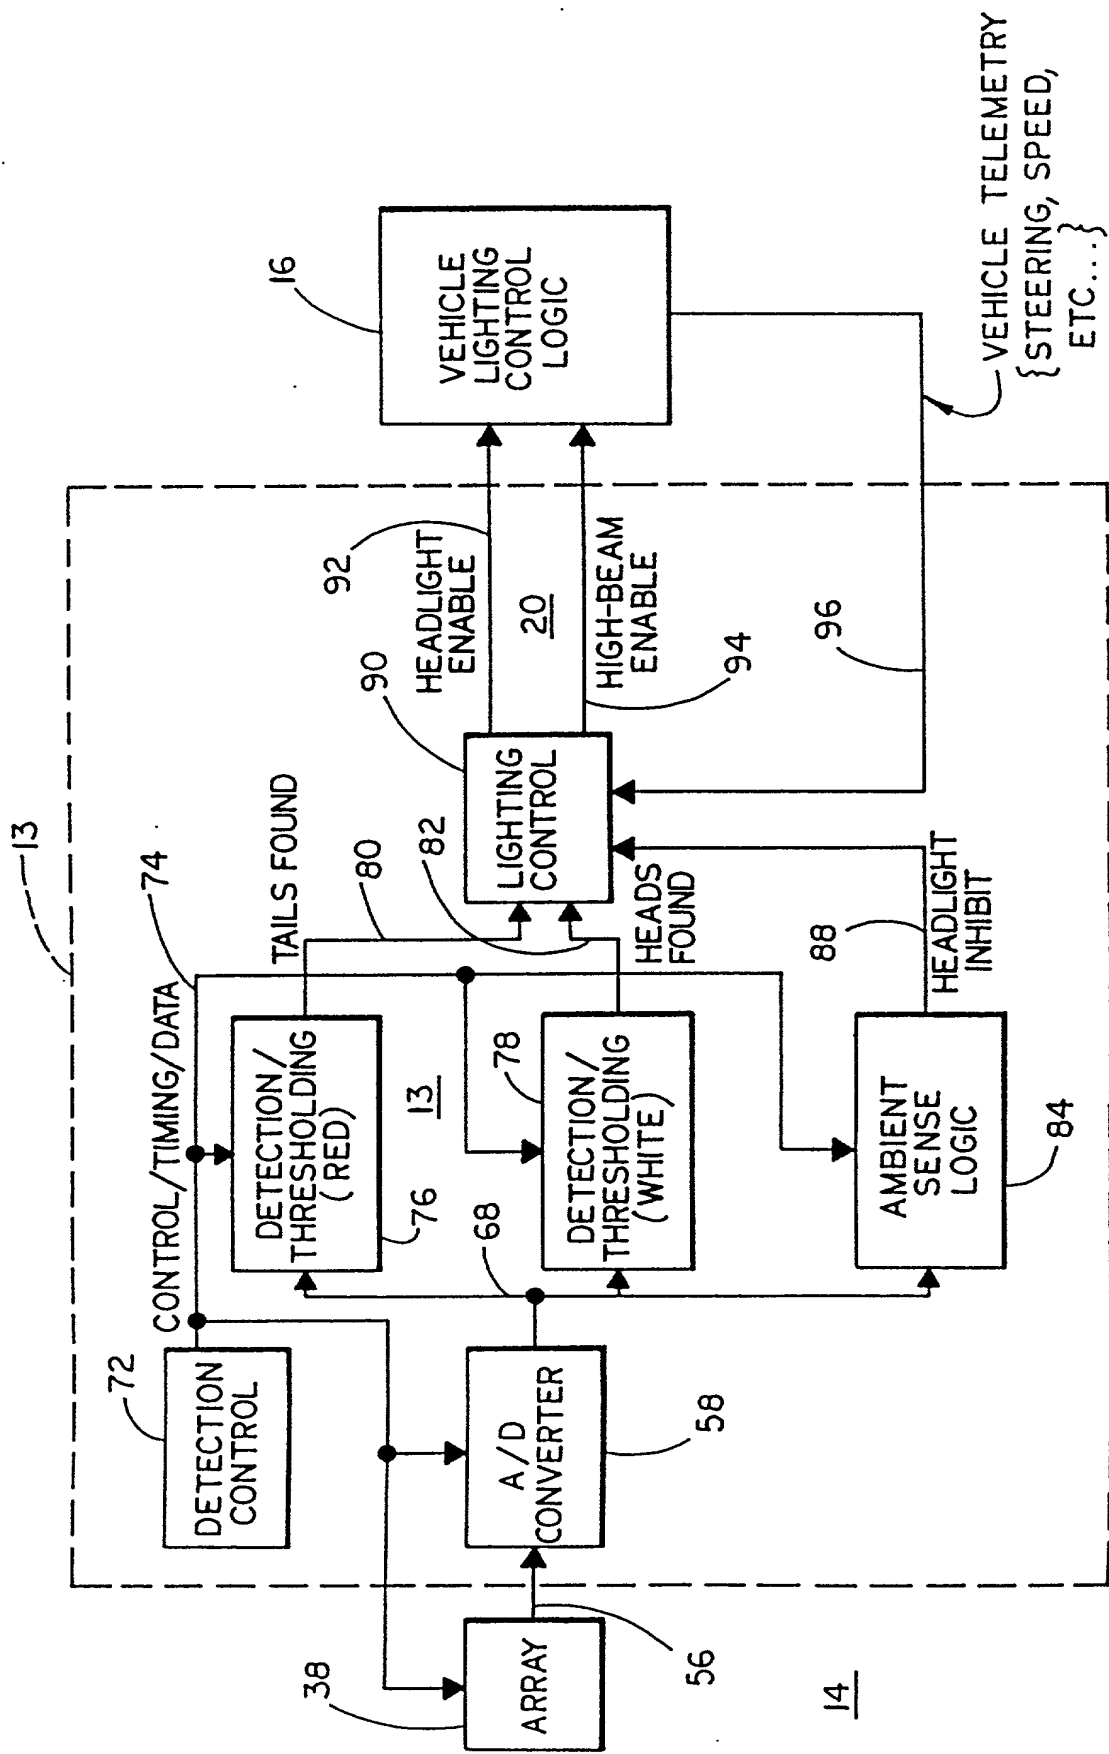

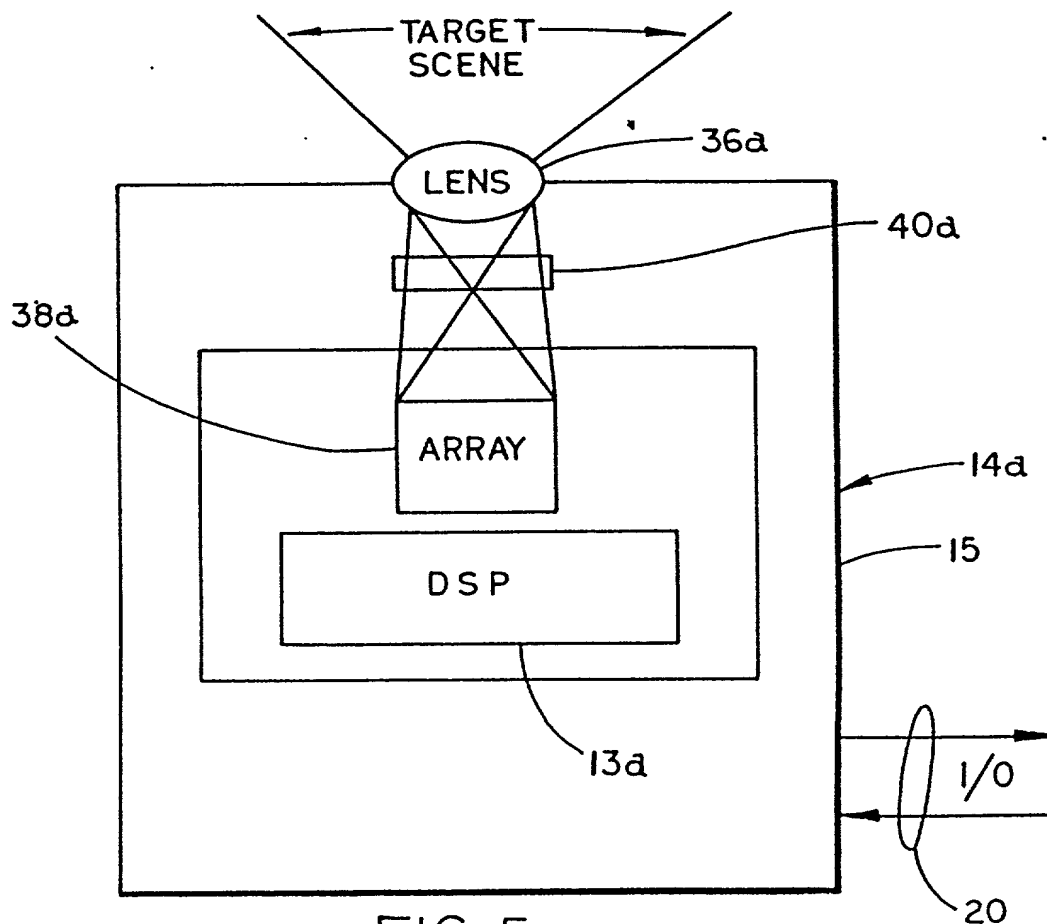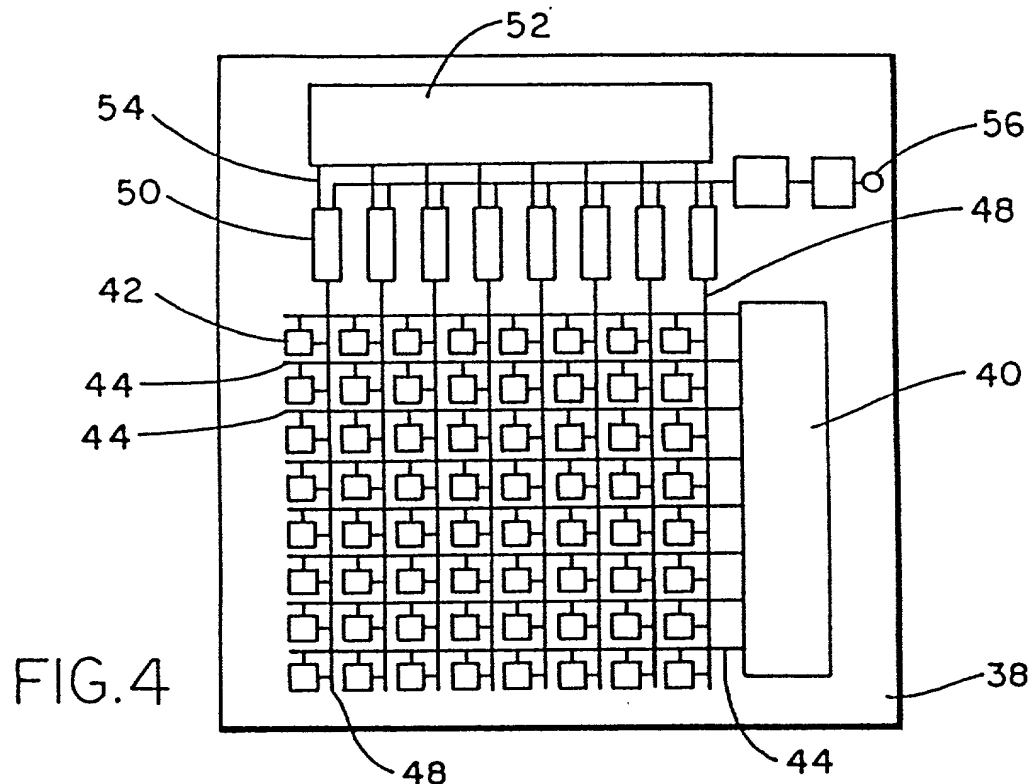




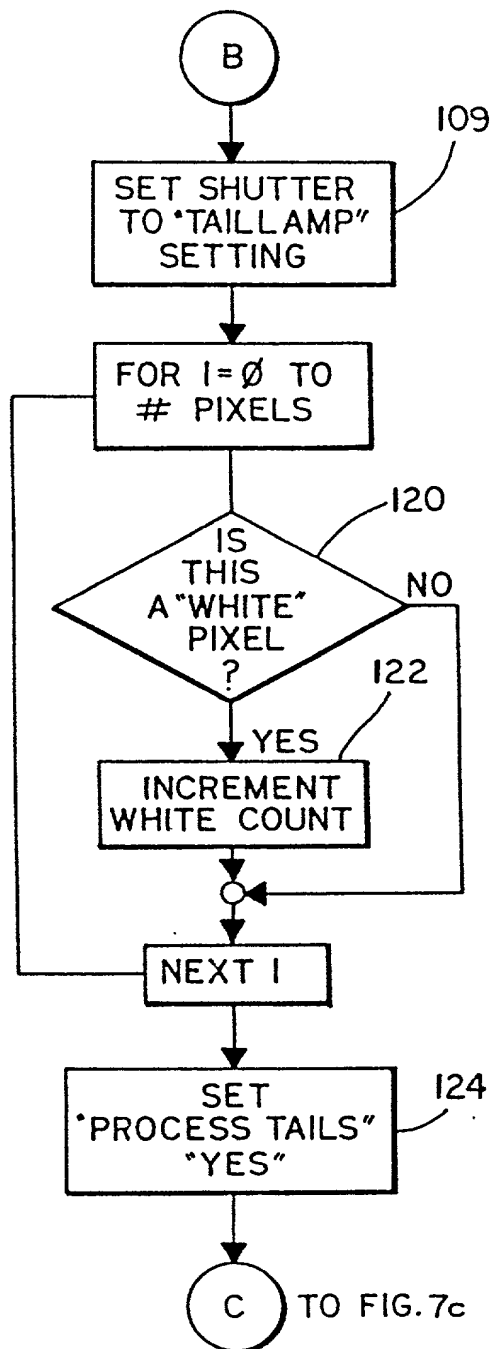


FIG. 7b

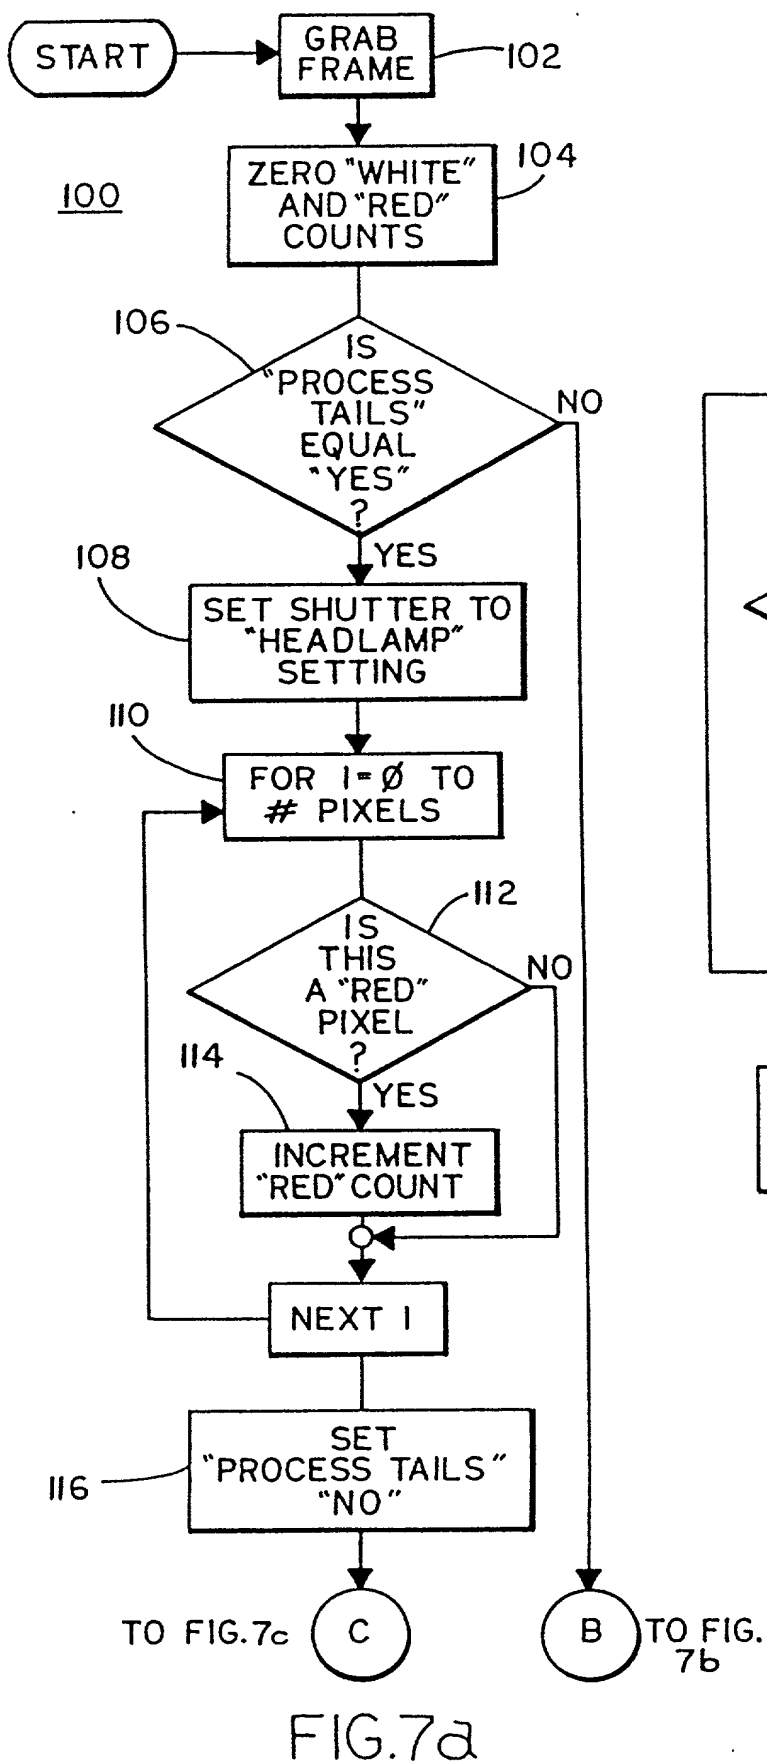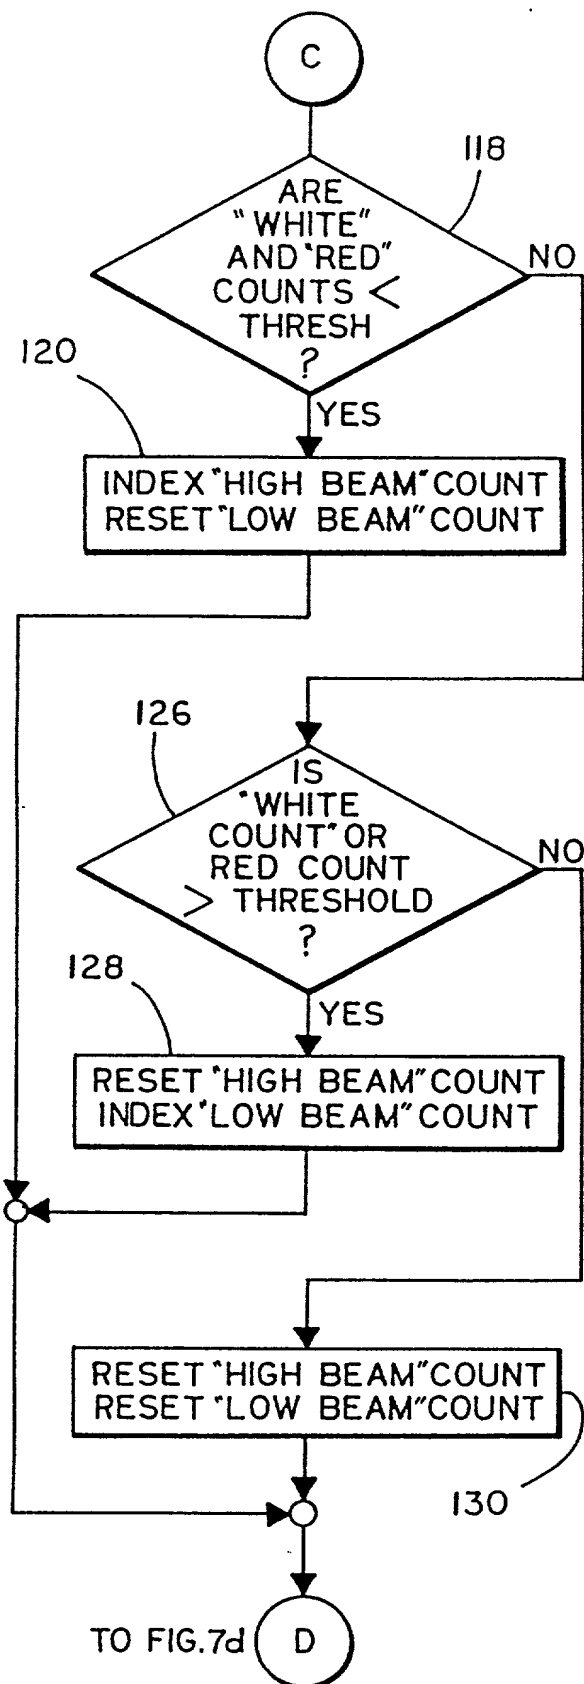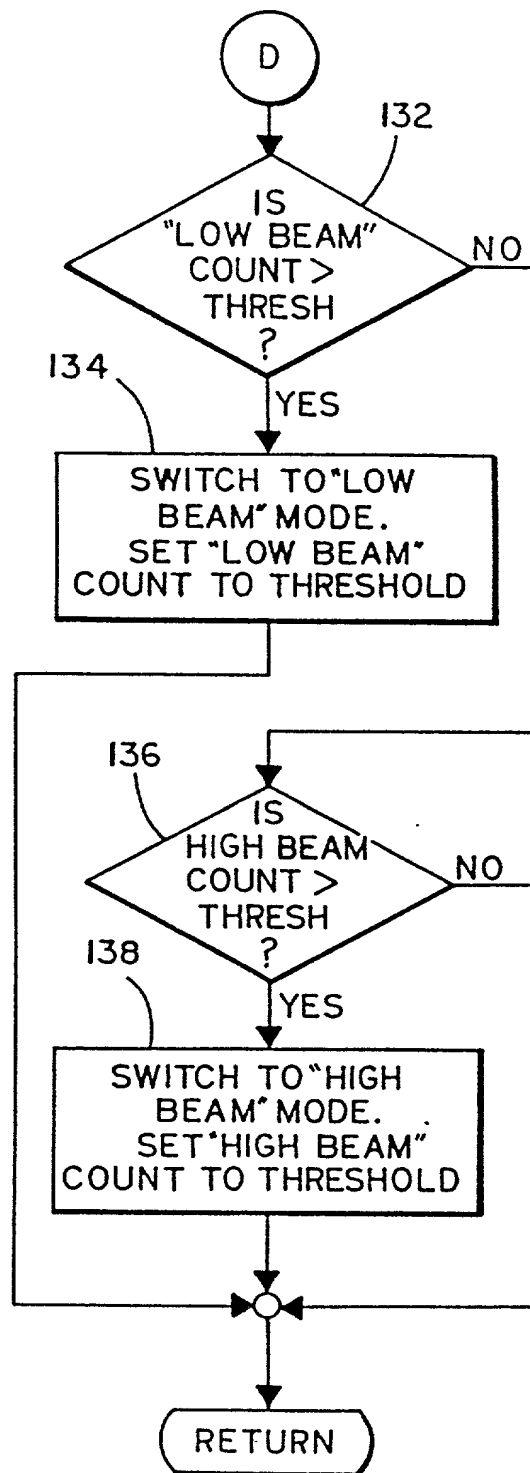

TO FIG. 7d



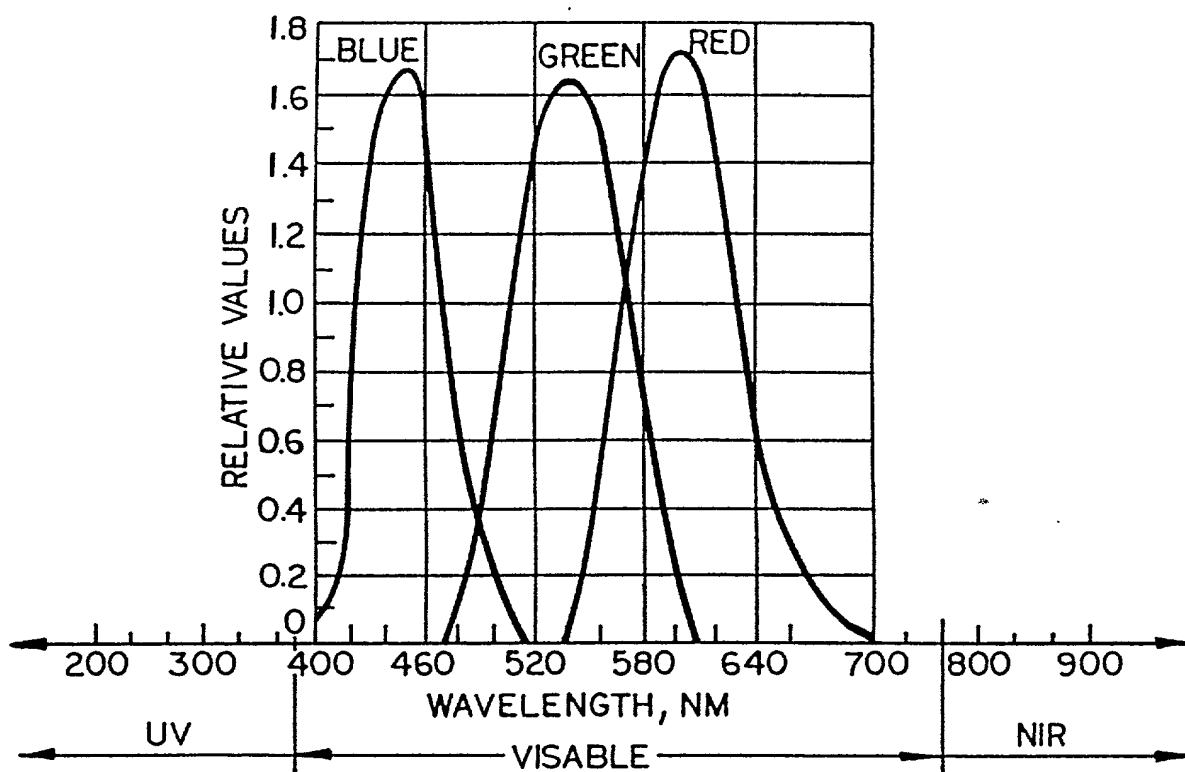


FIG. 8a

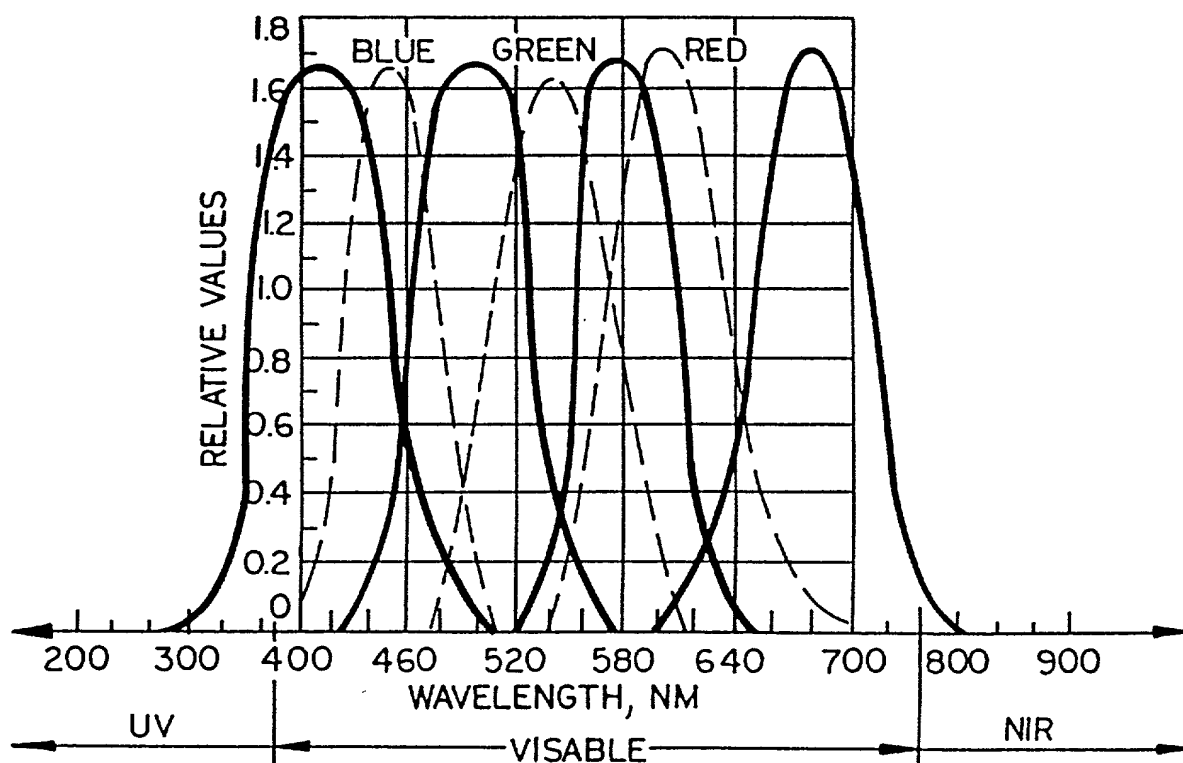


FIG. 8b

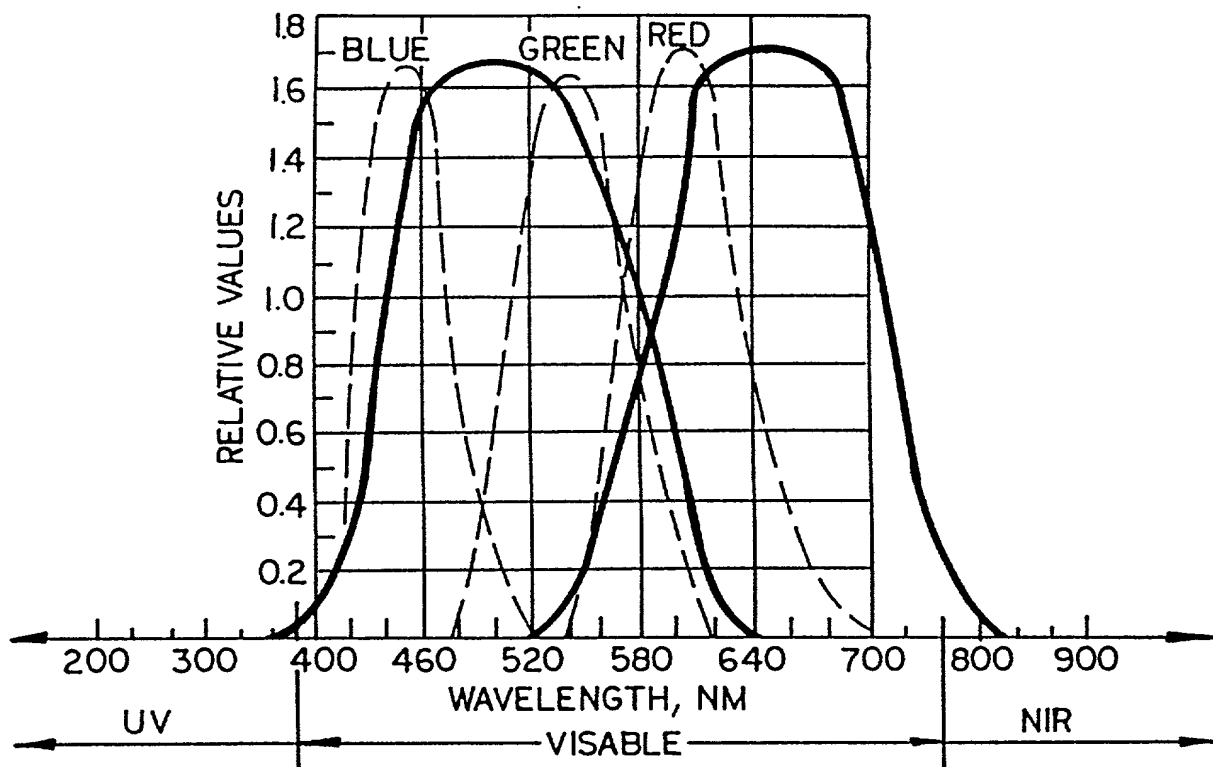


FIG. 8c

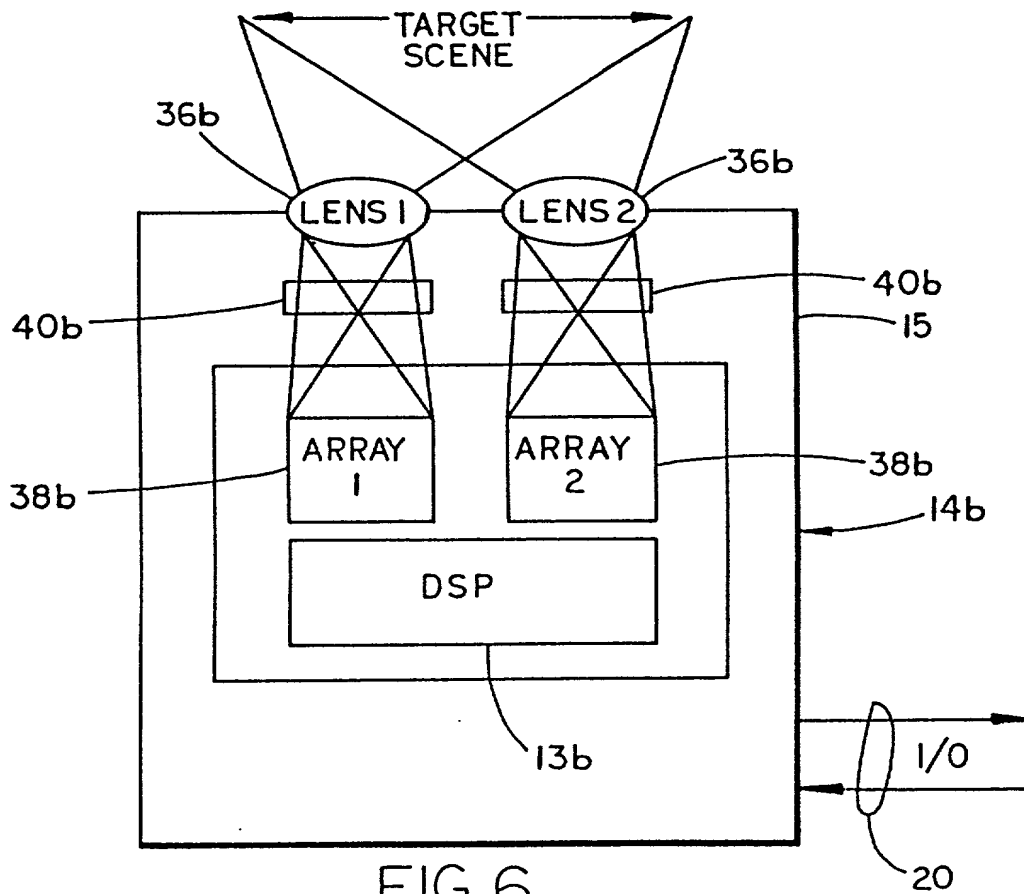


FIG. 6

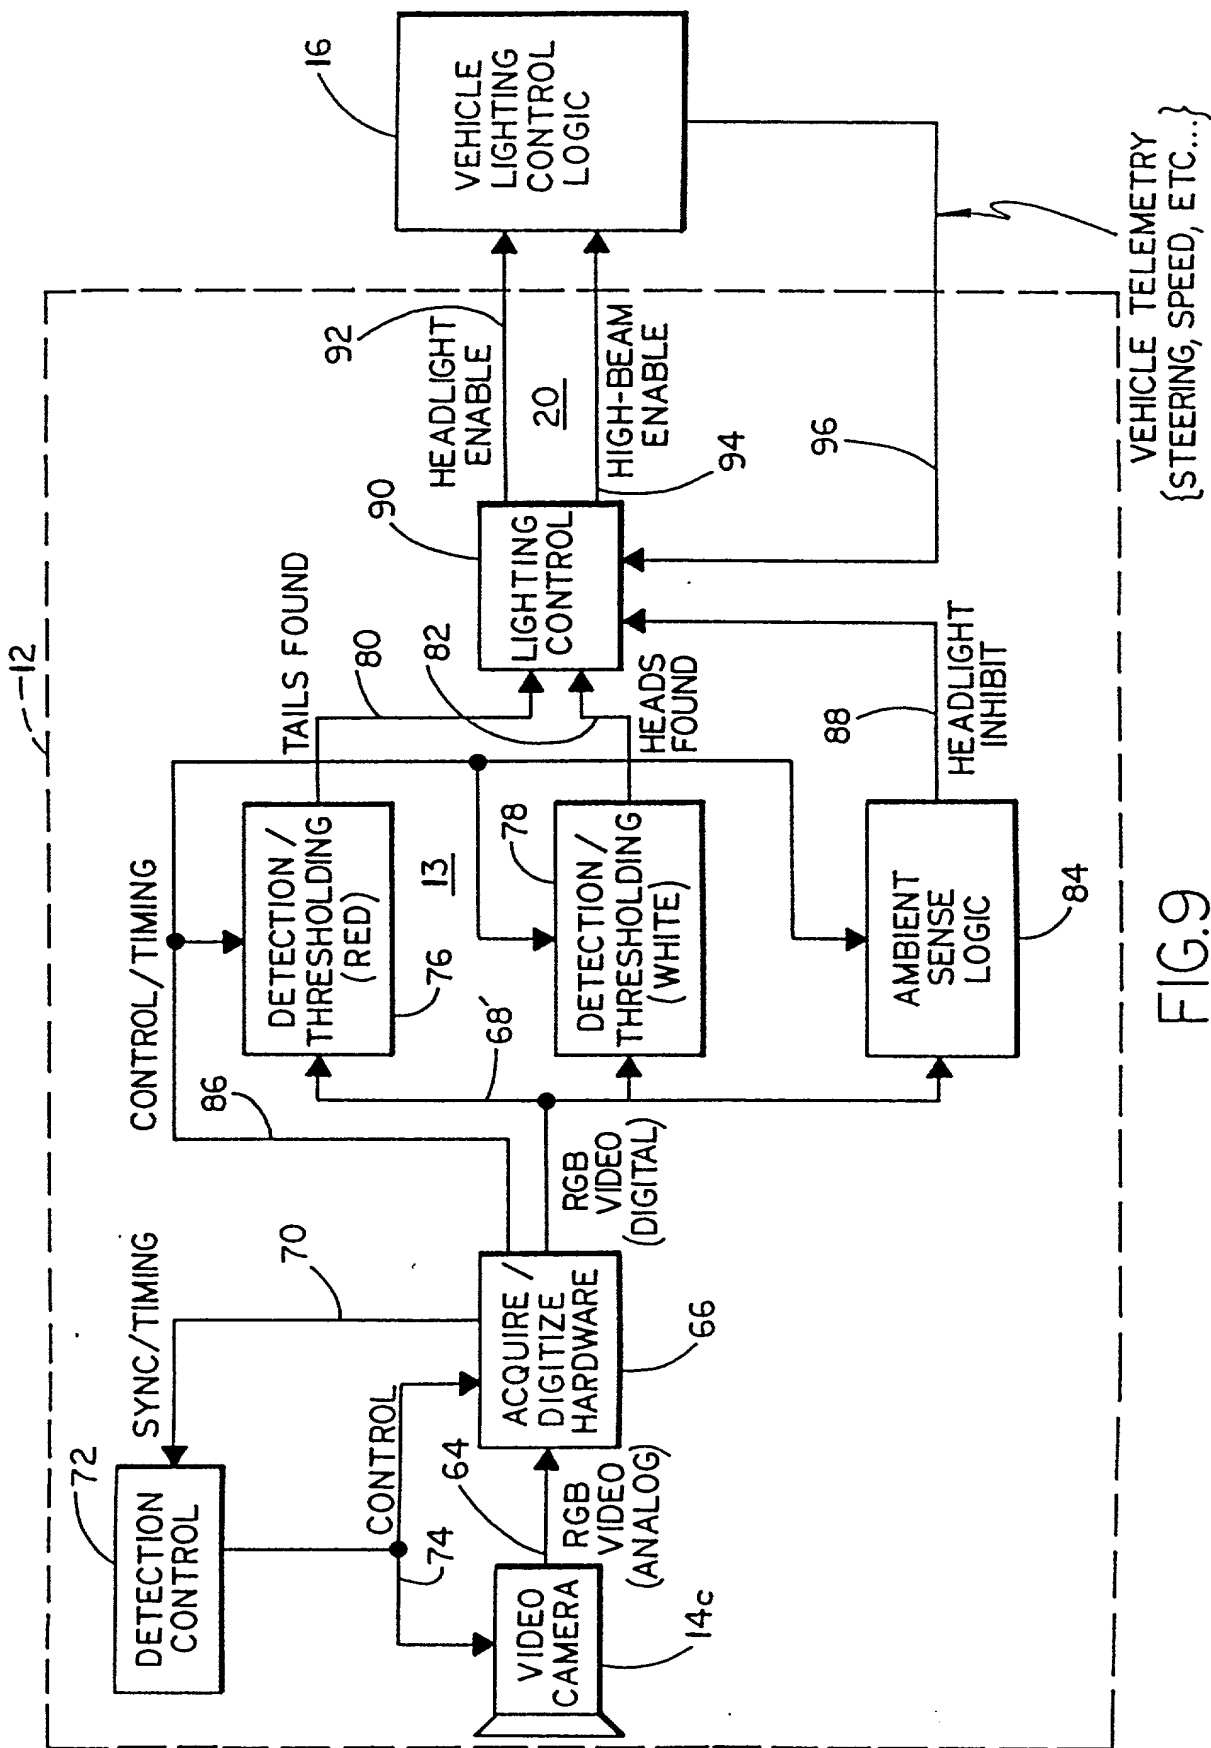


FIG. 10.

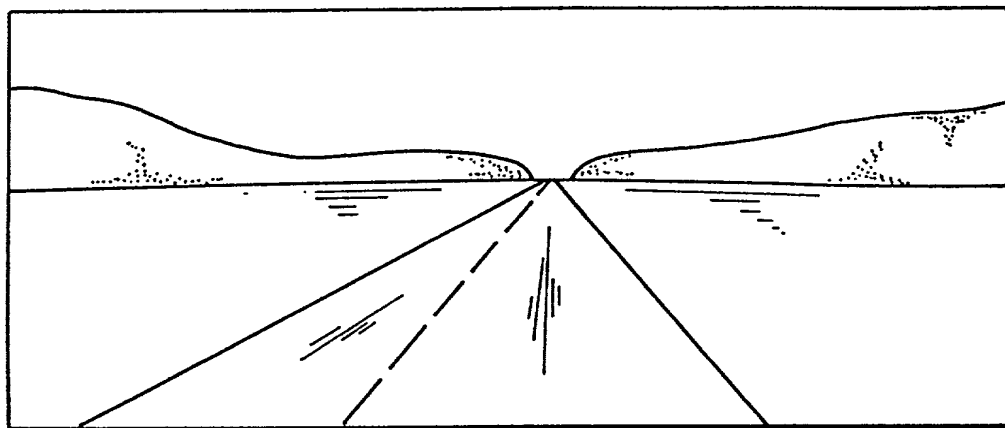


FIG. IIa

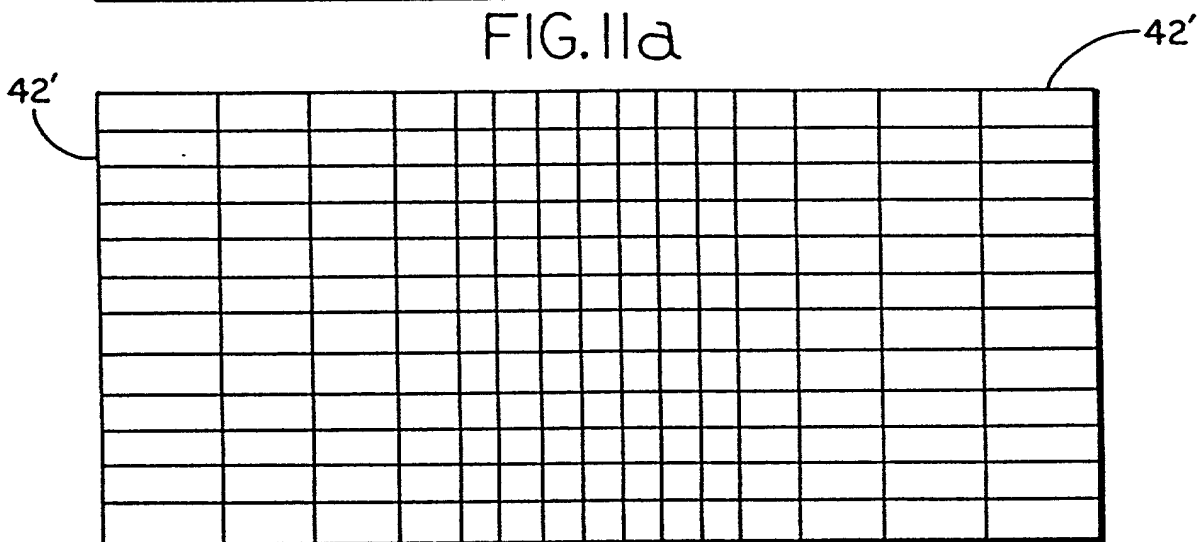


FIG. IIb

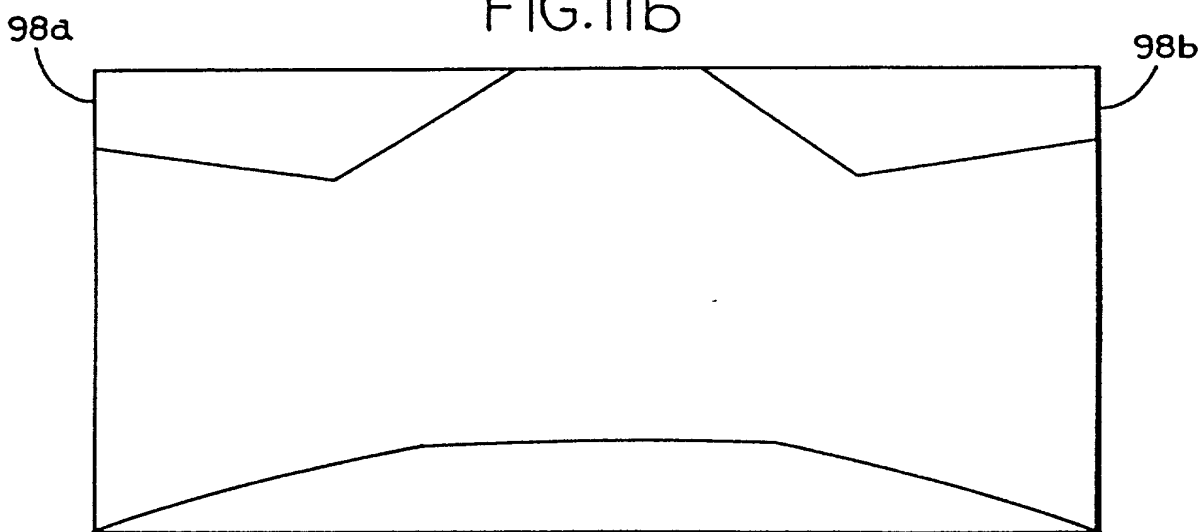


FIG. IIc

NORMAL (DRY) CONDITIONS:

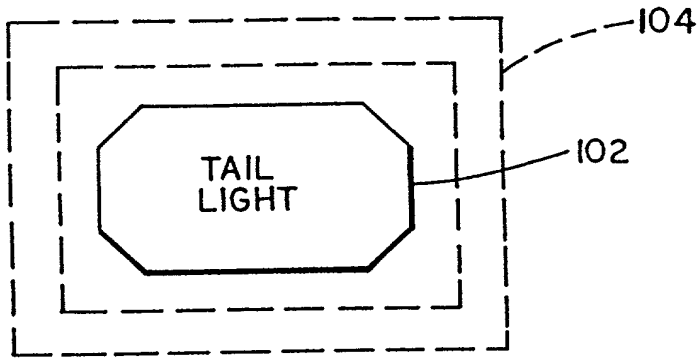


FIG.12a

FOGGY CONDITIONS:







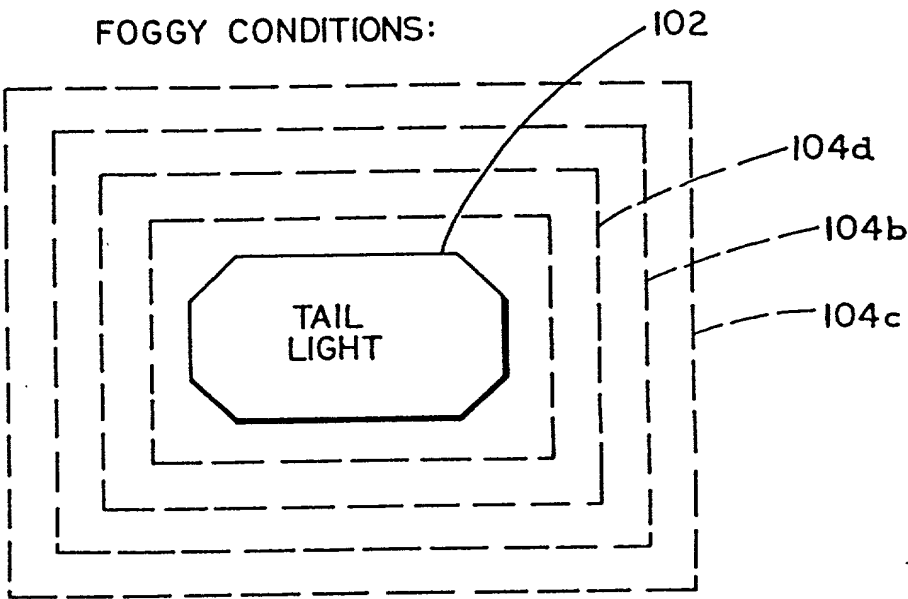


FIG.12b

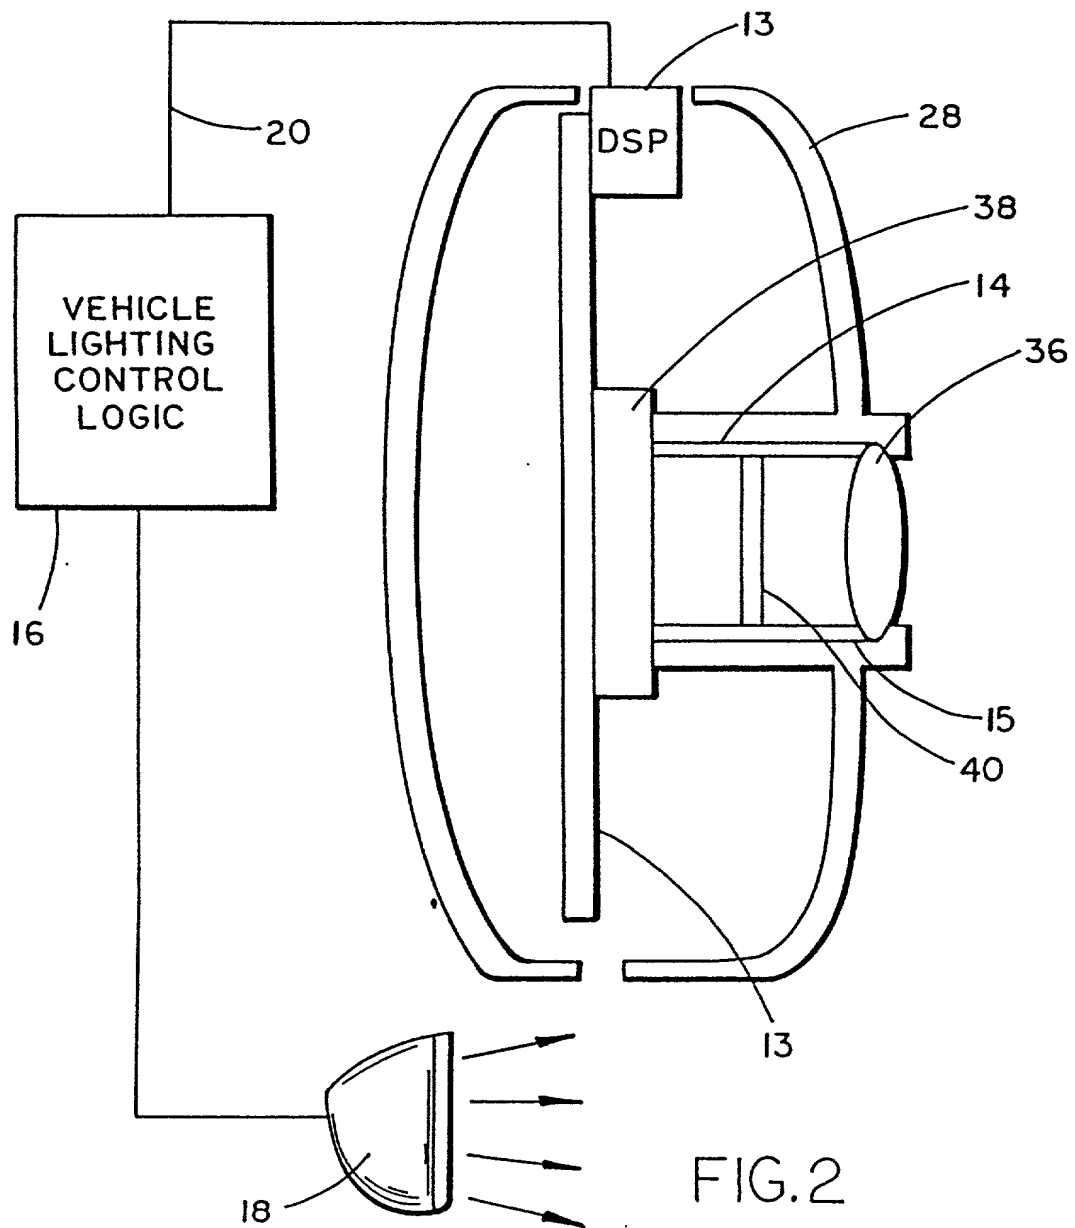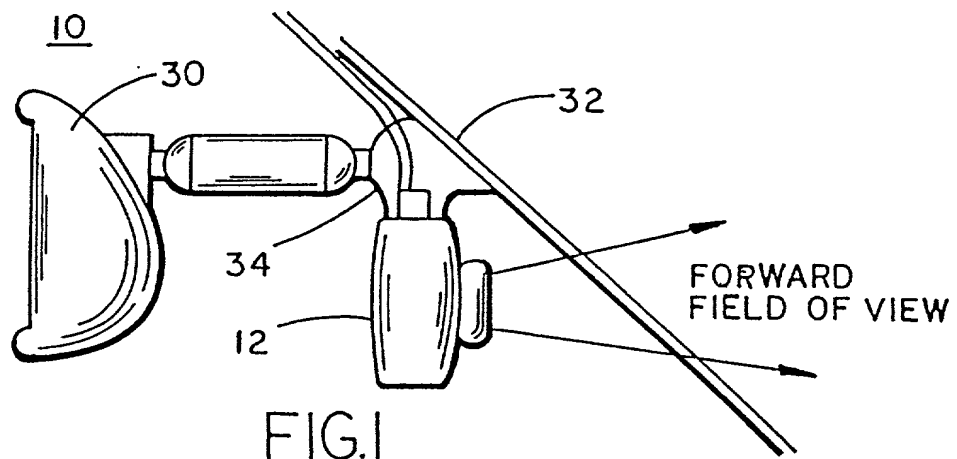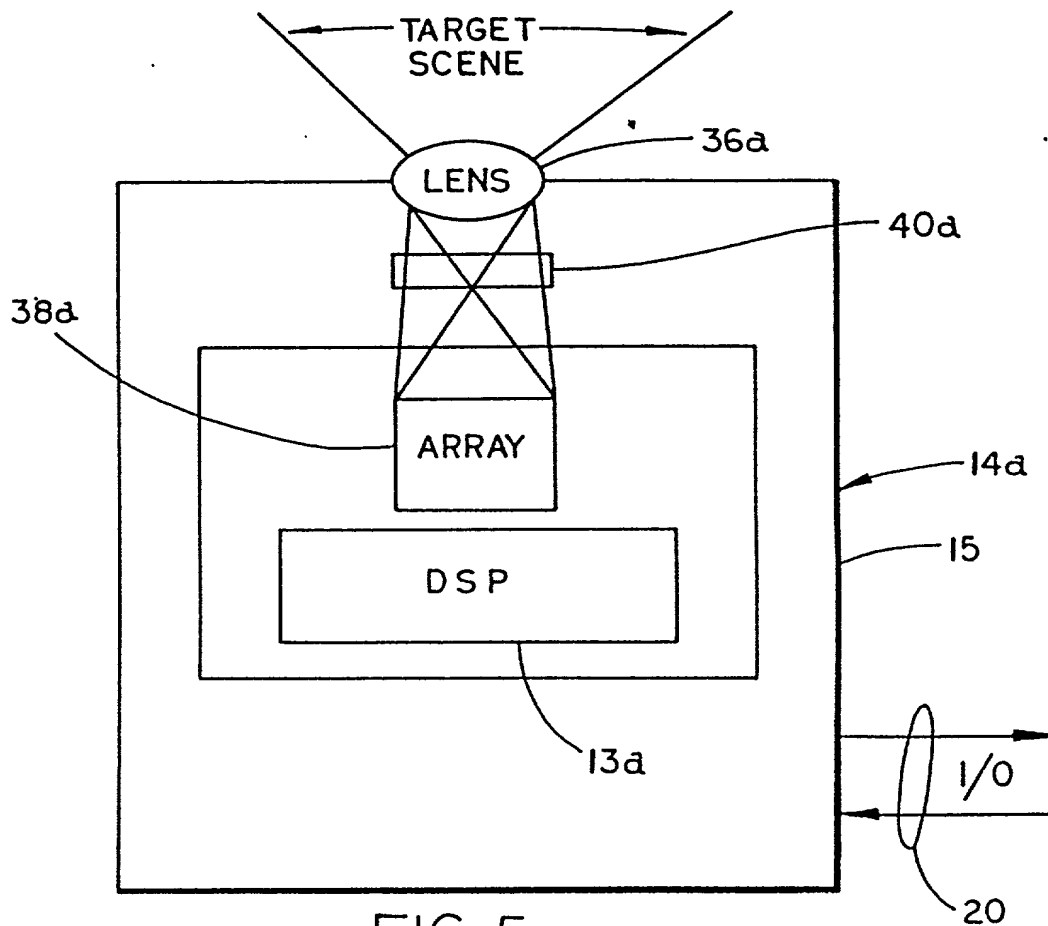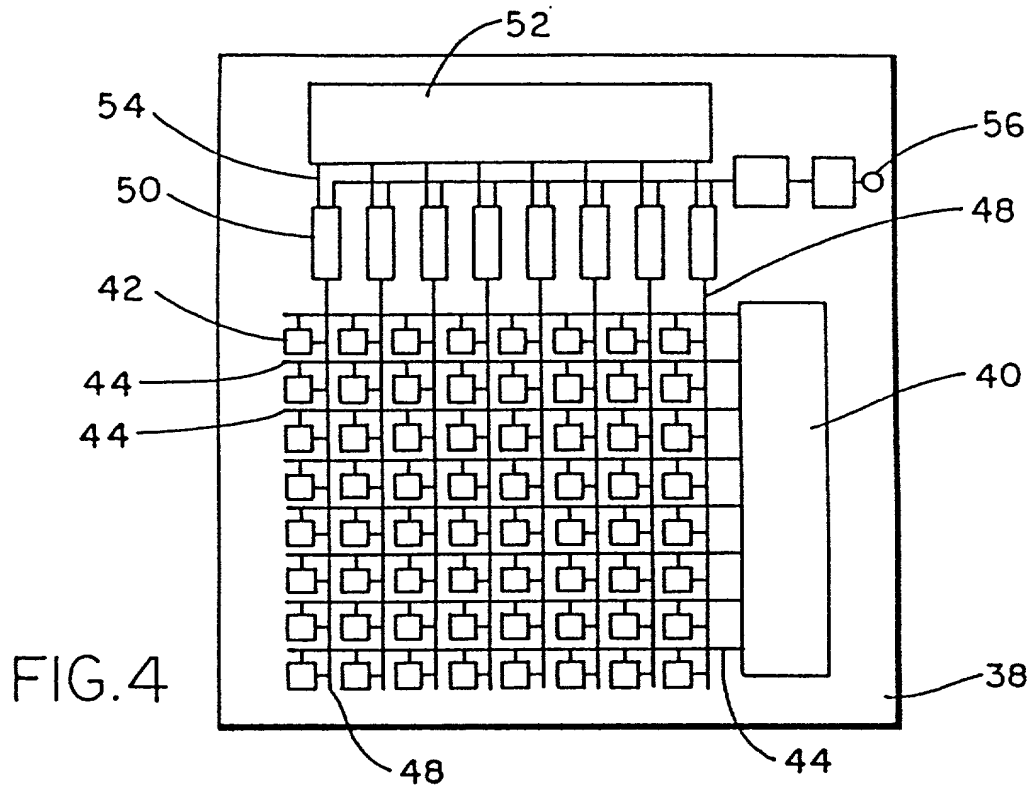

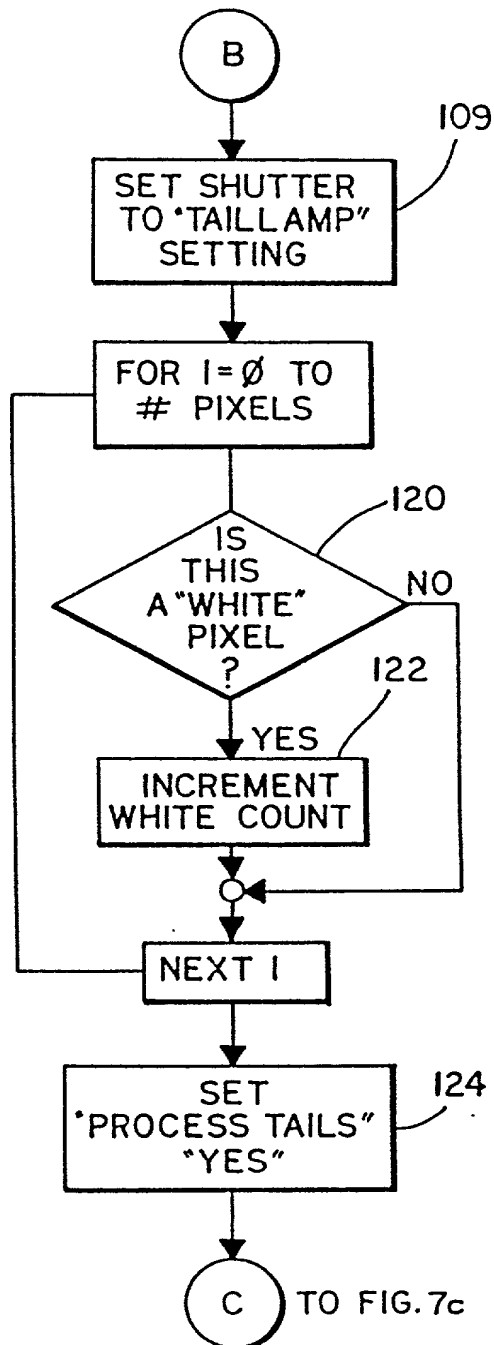

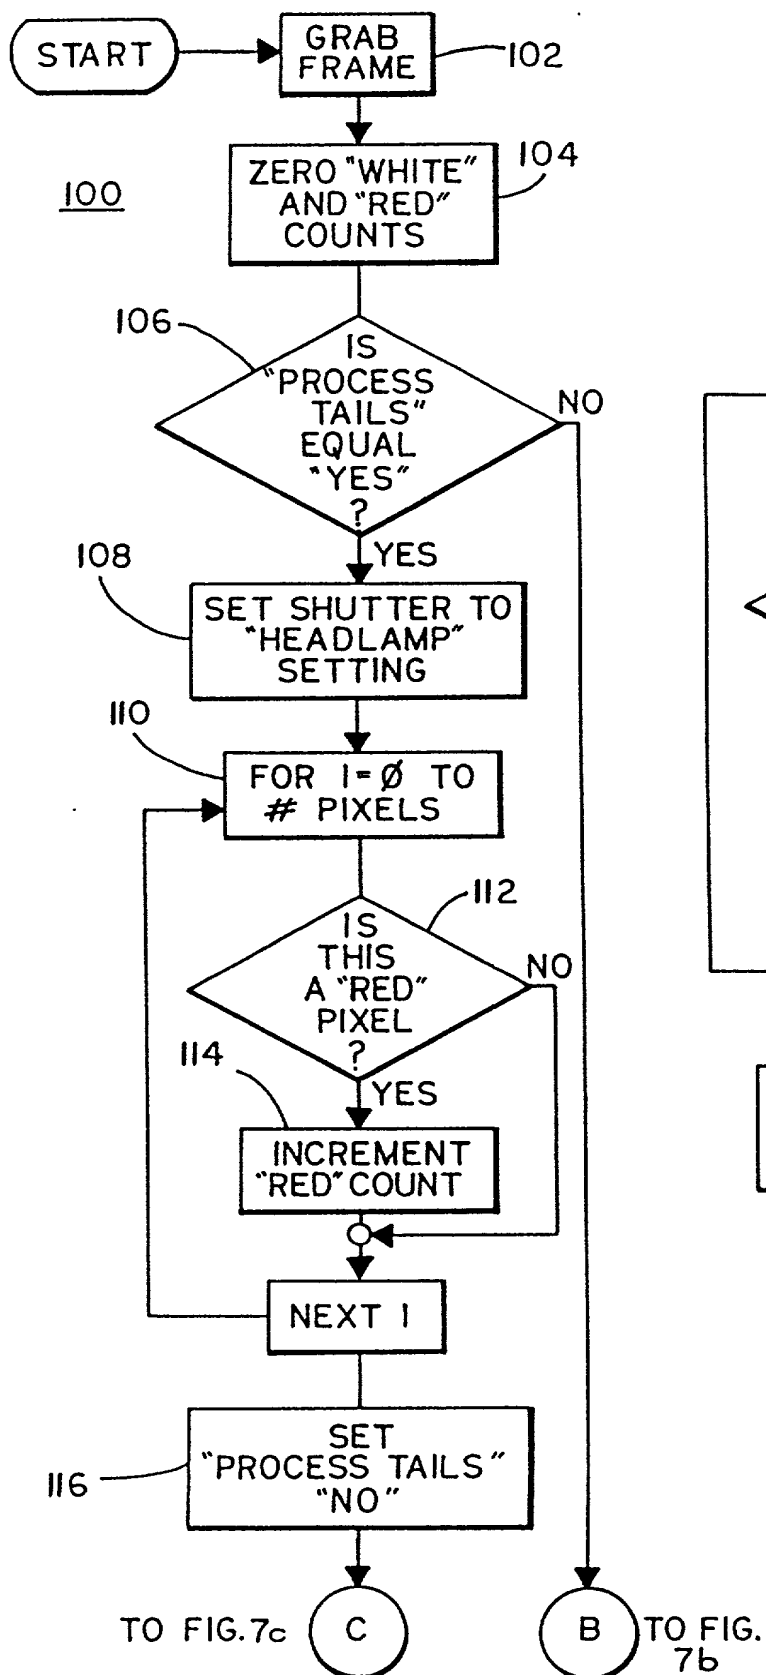

```

graph TD
    C((C)) --> 118{ARE  
"WHITE"  
AND "RED"  
COUNTS <  
THRESH  
?}
    118 -- YES --> 120[INDEX "HIGH BEAM" COUNT  
RESET "LOW BEAM" COUNT]
    118 -- NO --> 126{IS  
"WHITE  
COUNT" OR  
RED COUNT  
> THRESHOLD  
?}
    120 --> 126
    126 -- YES --> 128[RESET "HIGH BEAM" COUNT  
INDEX "LOW BEAM" COUNT]
    126 -- NO --> 130[RESET "HIGH BEAM" COUNT  
RESET "LOW BEAM" COUNT]
    128 --> J1(( ))
    130 --> J1
    J1 --> J2(( ))
    J2 --> D((D))
    J2 --> 118

```

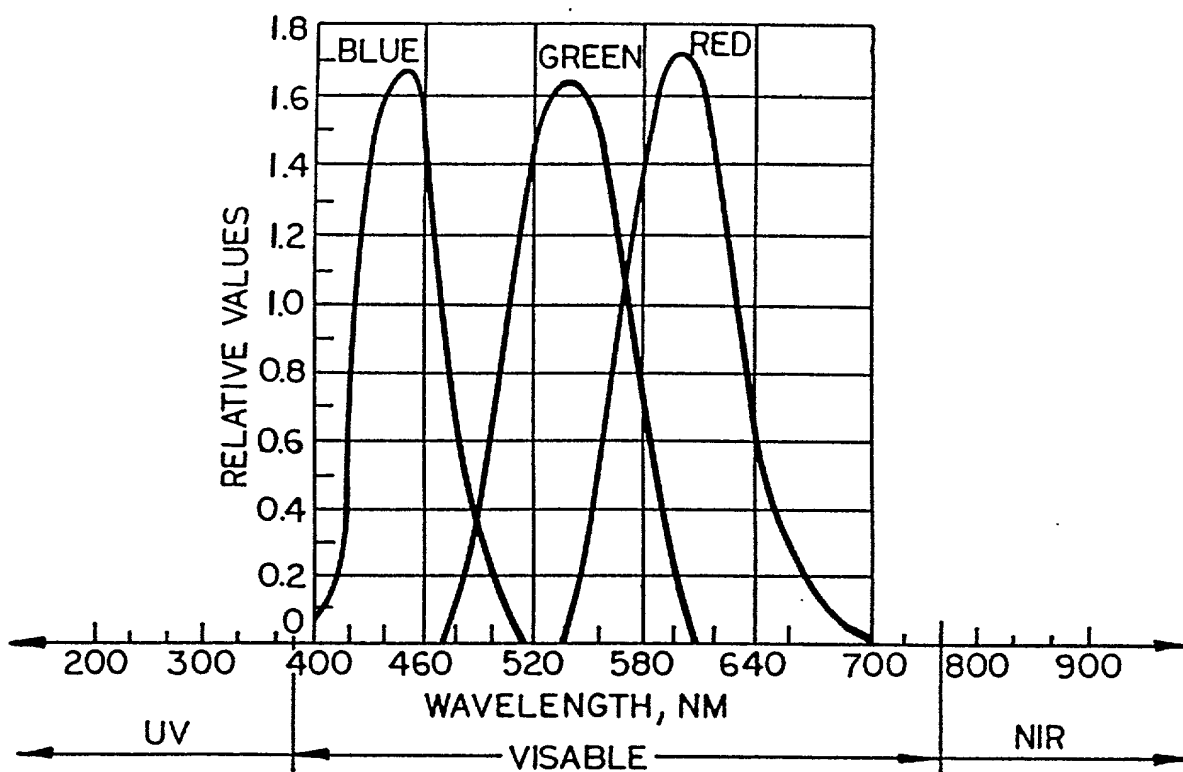


FIG. 8a

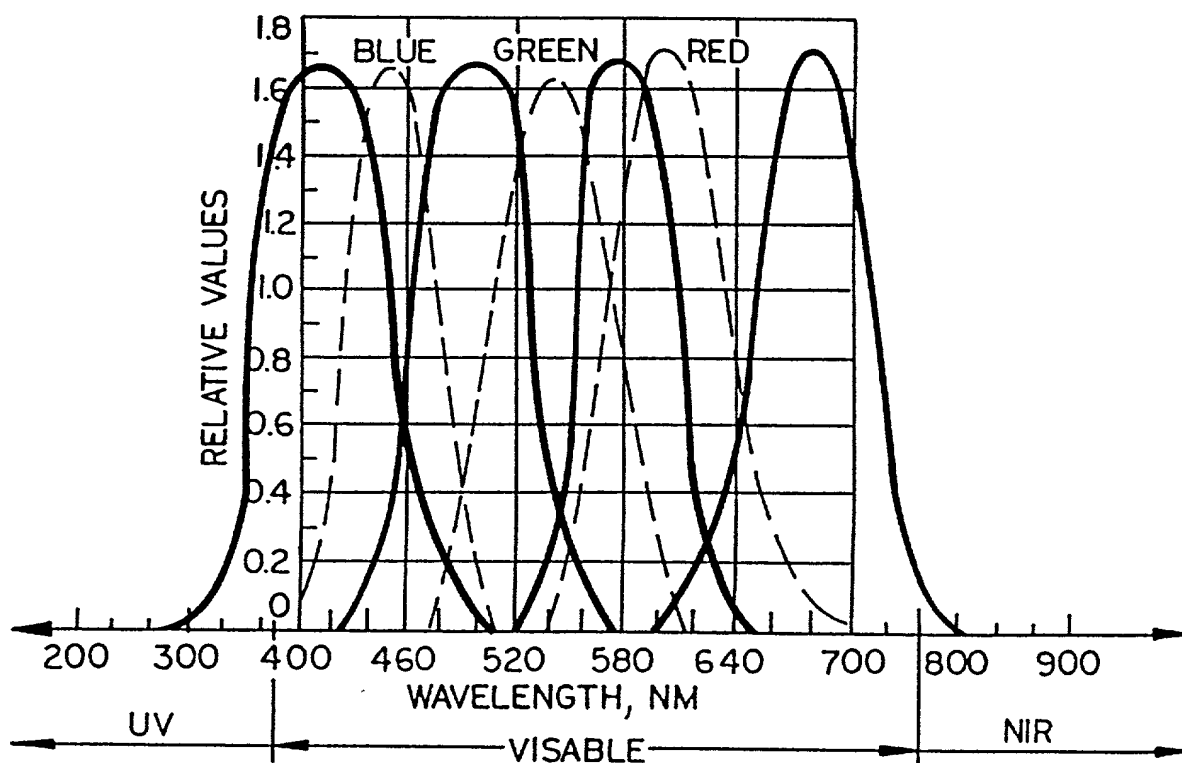


FIG. 8b

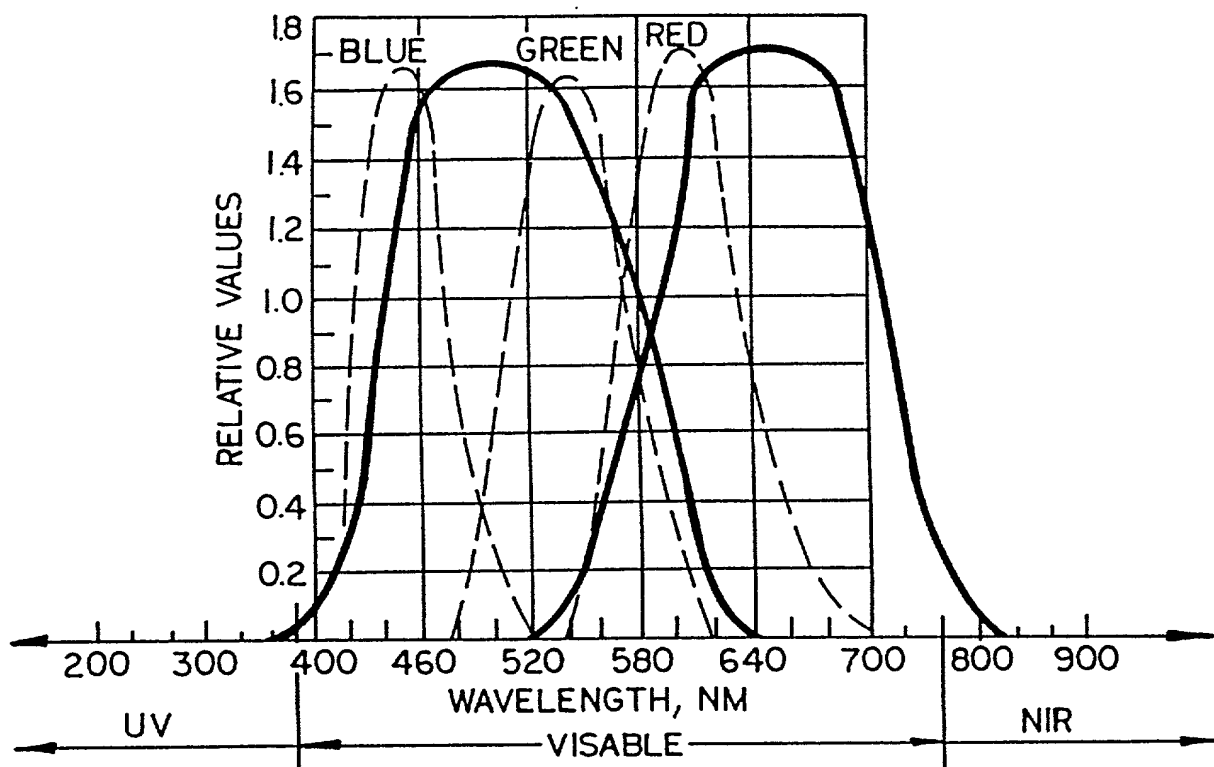


FIG. 8c

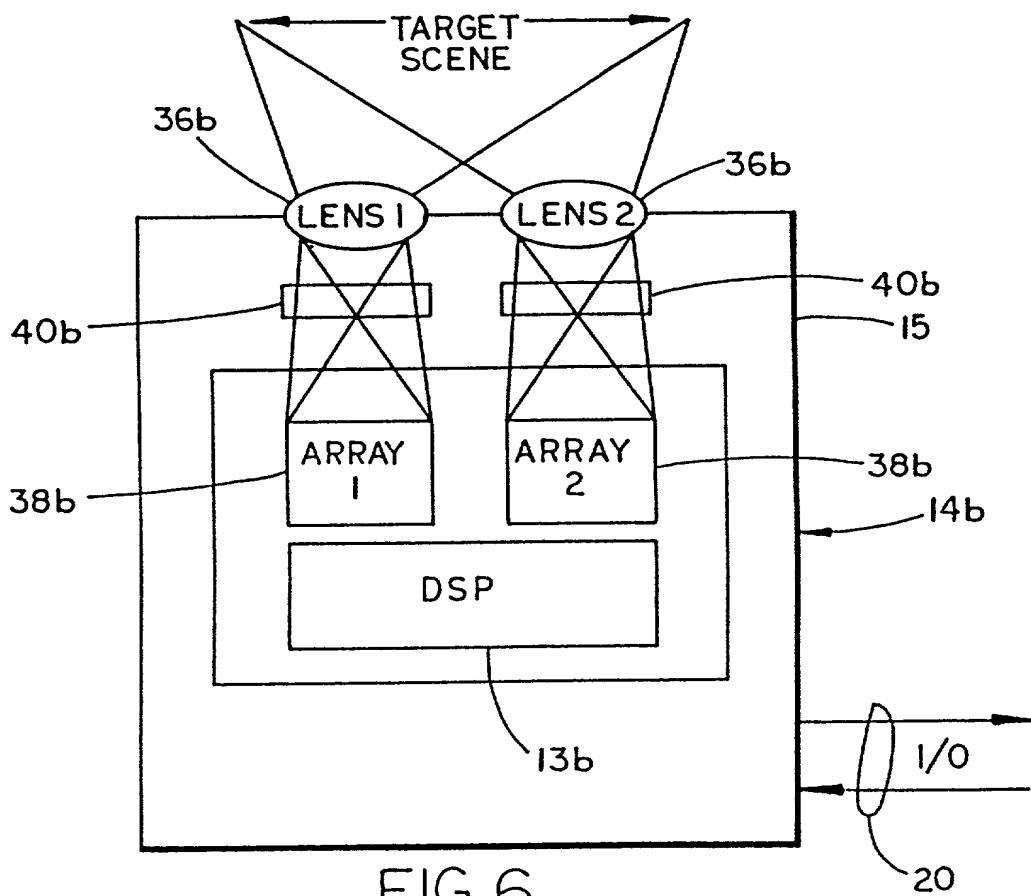


FIG. 6

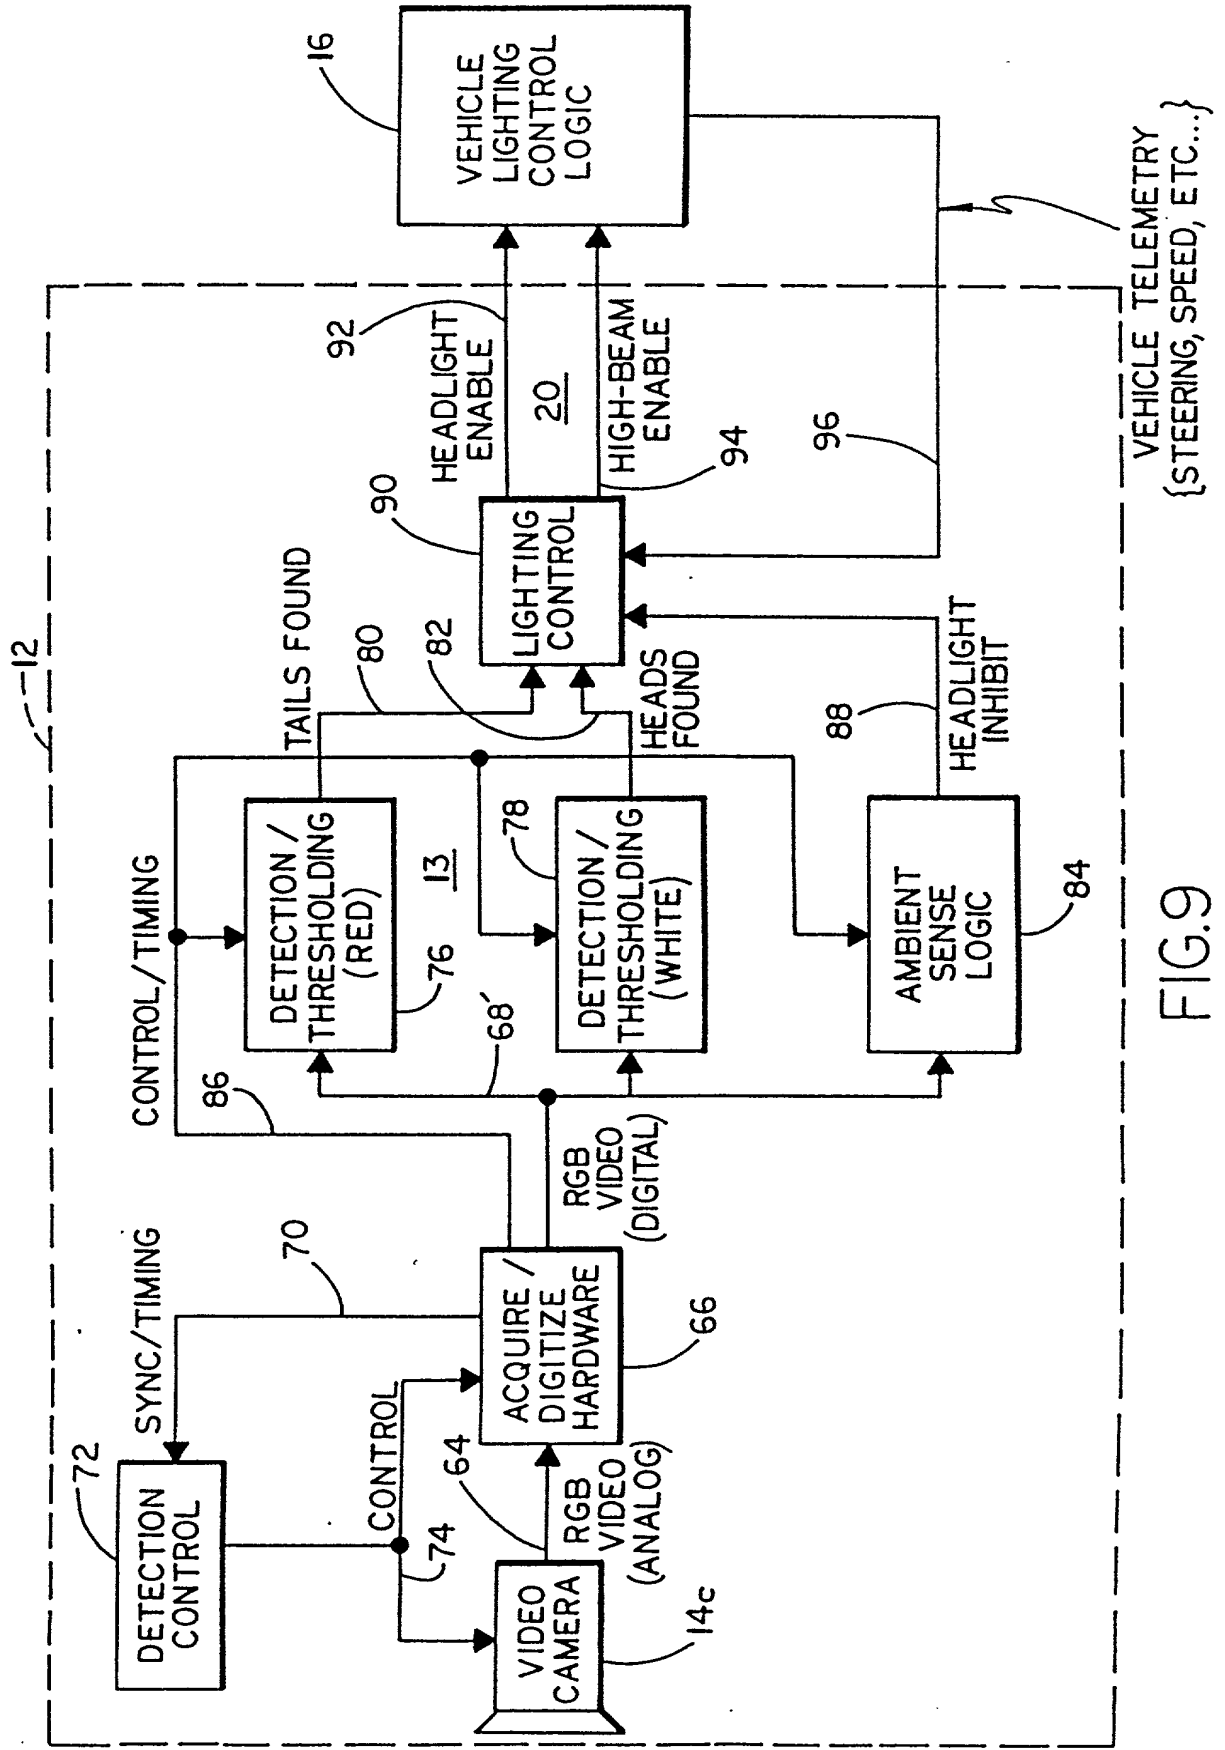


FIG. 9

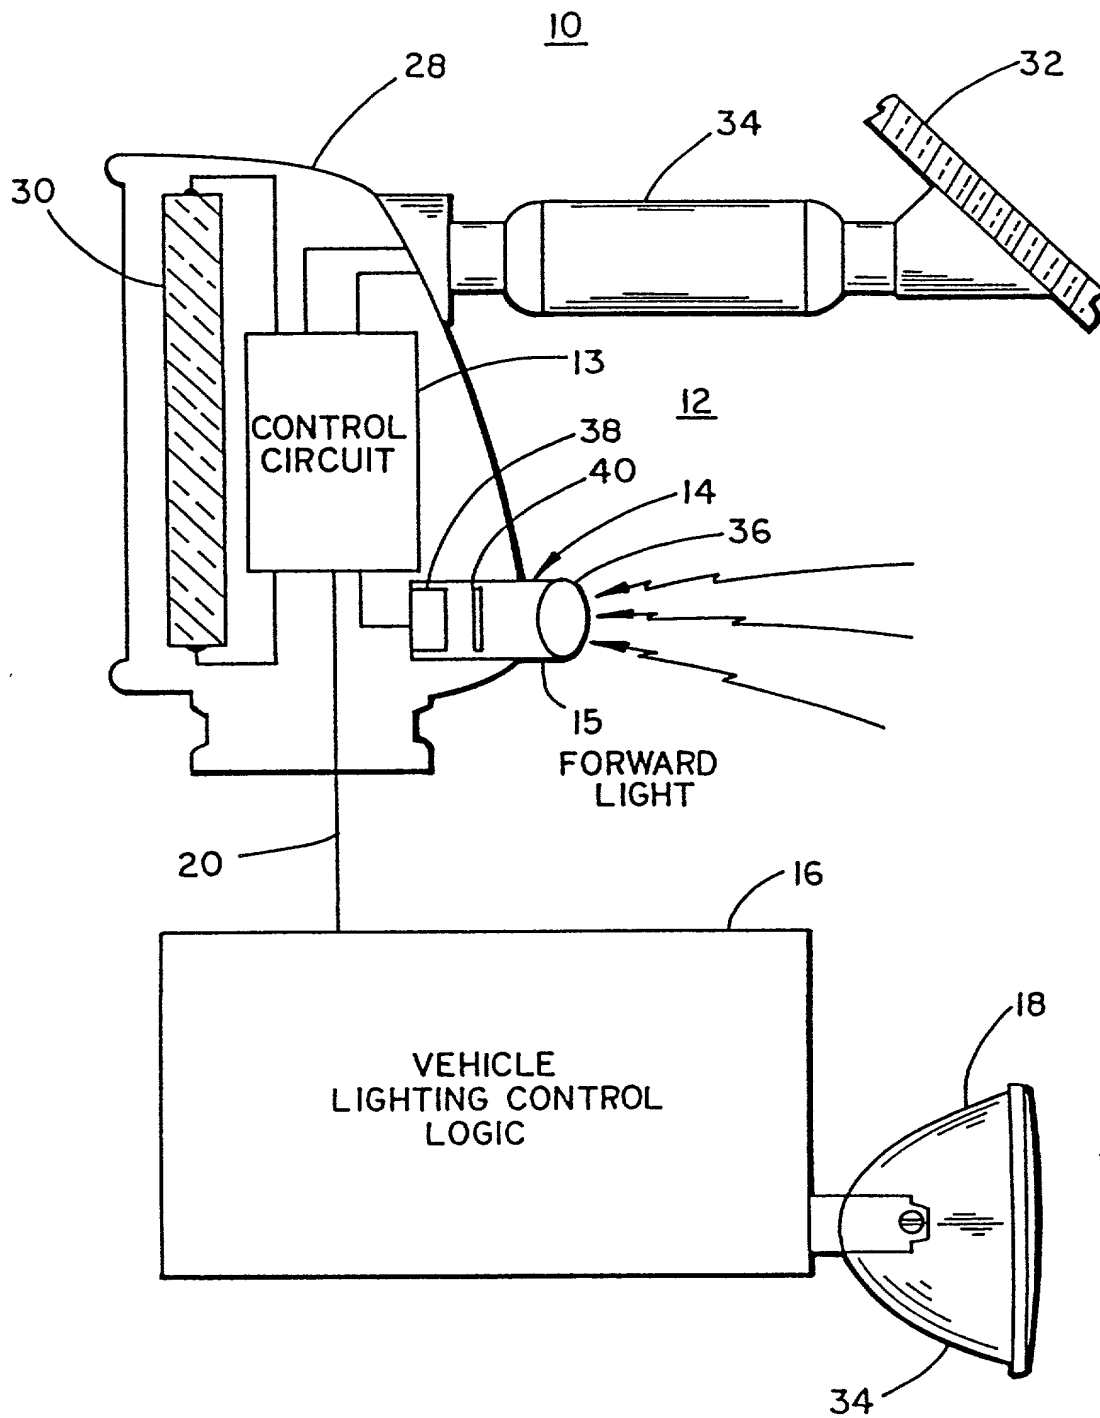


FIG. 10

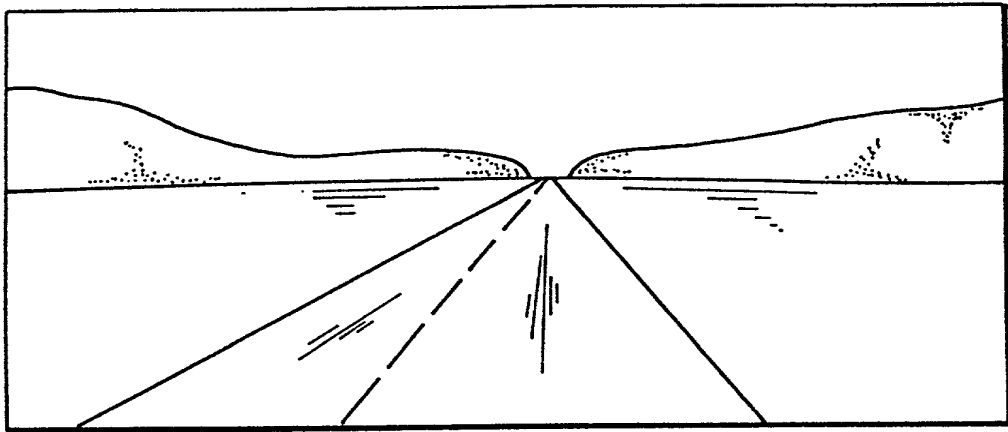


FIG. IIa

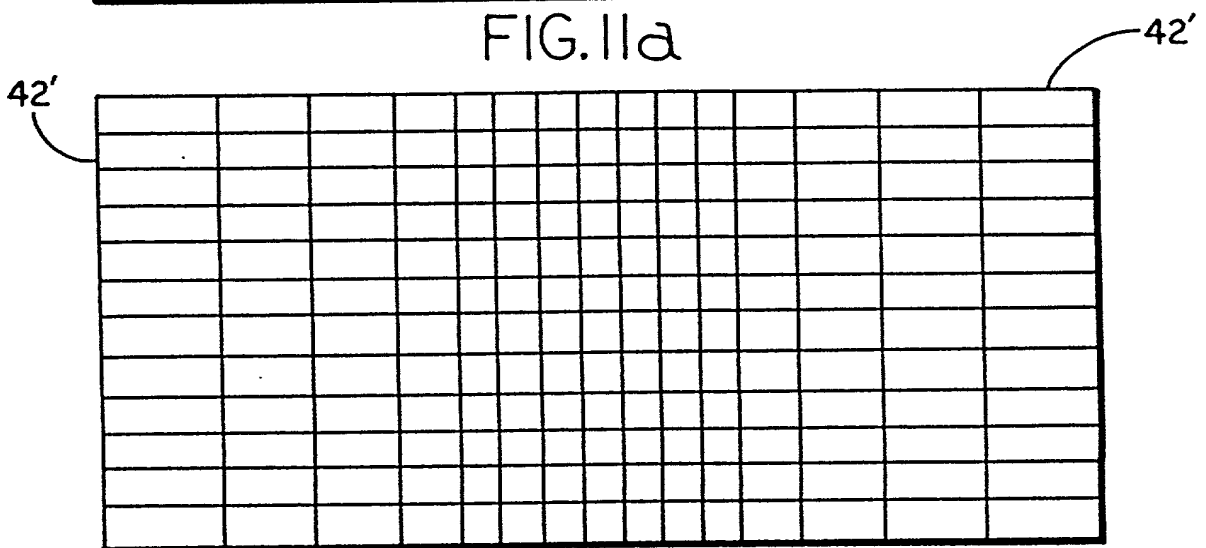


FIG. IIb

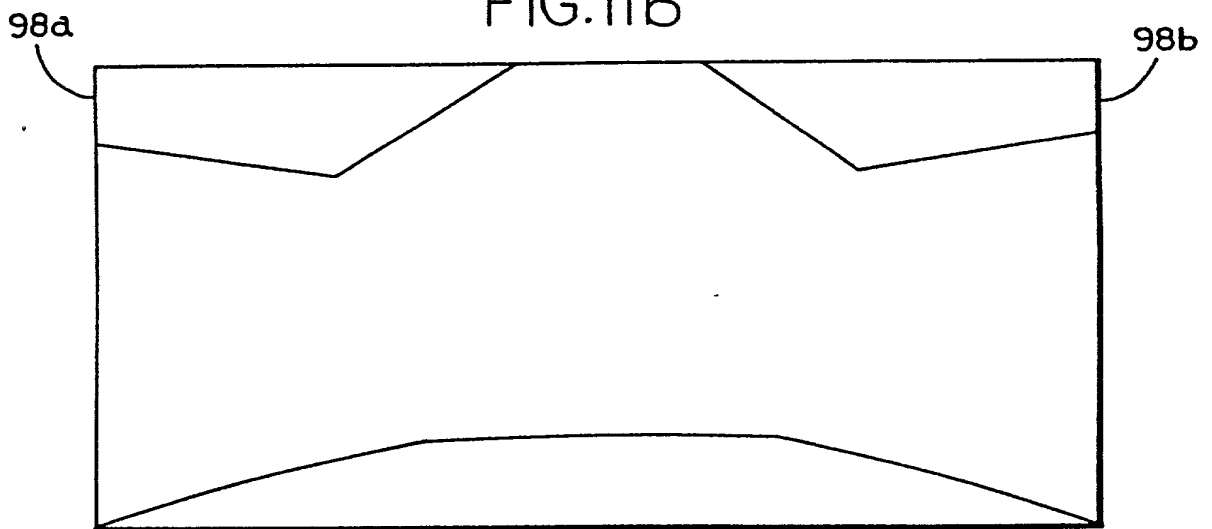


FIG. IIc

NORMAL (DRY) CONDITIONS:

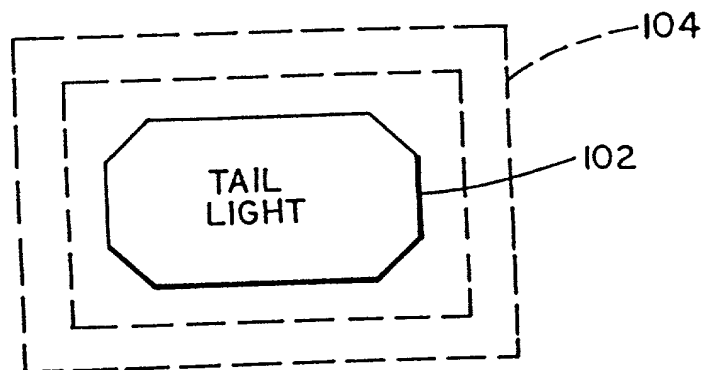


FIG.12a

FOGGY CONDITIONS:

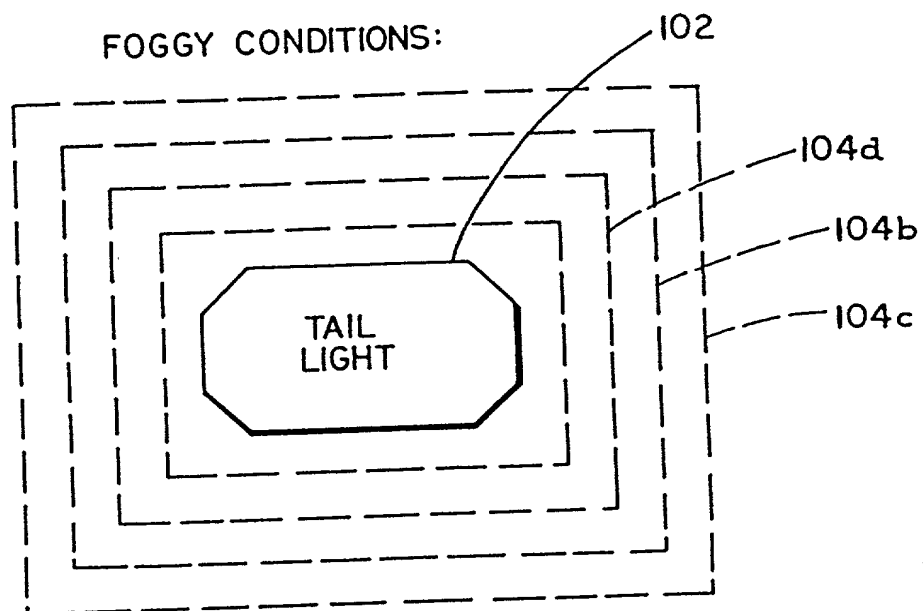


FIG.12b

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor, if only one name is listed below, or an original, first and joint inventor, if plural names are listed below, of the subject matter which is claimed and for which a patent is sought on the invention entitled VEHICLE HEADLIGHT CONTROL USING IMAGING SENSOR, the specification of which is attached hereto.

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office (the Office), all information which is known by me to be material to patentability as defined in Title 37, Code of Federal Regulations (C.F.R.), Section 1.56.

CLAIM OF PRIORITY

I hereby claim the benefit under 35 U.S.C. § 120, of any United States application(s) listed below and, insofar as the above-identified specification, including claims, discloses and claims subject matter in addition to that disclosed in the prior copending application(s), listed below, I acknowledge the duty to disclose to the Office, all information which is known by me to be material to patentability as defined in 37 C.F.R. § 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Serial No. 08/023,918, filed on February 26, 1993, and now pending.

POWER OF ATTORNEY

I hereby appoint the patent law firm of Van Dyke, Gardner, Linn & Burkhart, LLP, 2851 Charlevoix Drive, S.E., Suite 207, Grand Rapids, Michigan 49546, telephone number 616/975-5500, facsimile number 616/975-5505, and the individual patent attorneys and patent agents at such patent law firm, namely, Daniel Van Dyke, Reg. No. 25 046; Donald S. Gardner, Reg. No. 25 975; Terence J. Linn, Reg. No. 30 283; and Frederick S. Burkhart, Reg. No. 29 288, my attorney(s) or agent(s) with full power of substitution and revocation, to prosecute this application and to transact all business in and to receive all correspondence from the Patent and Trademark Office connected therewith.

All statements made herein of my own knowledge are true and all statements made on information and belief are believed to be true, and further, these statements are made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under 18 U.S.C. § 1001, and that such willful false statements may jeopardize the validity of this application or any patent issued thereon.

Sole or First joint inventor:

Kenneth Schofield 3/22/96
 Kenneth (NMI) Schofield Date
 Citizenship: United Kingdom
 Residence: 4793 Crestridge Court
 Holland, MI 49423
 Post Office Address: 4793 Crestridge Court
 Holland, MI 49423

Second joint inventor:

Mark L. Larson 3-22-96
 Mark L. Larson Date
 Citizenship: United States of America
 Residence: 13873 Oakwood Circle
 Grand Haven, MI 49417
 Post Office Address: 13873 Oakwood Circle
 Grand Haven, MI 49417

Third joint inventor:

Keith J. Vadas
 Keith J. Vadas
 Citizenship: United States of America
 Residence: 552 Harrison Avenue
 Coopersville, MI 49404
 Post Office Address: 552 Harrison Avenue
 Coopersville, MI 49404

OFFICE OF THE ATTORNEY GENERAL